GLOBAL
OVERSEAS WAREHOUSES

YINGHE company is an outstanding China supplier authorized by Alibaba since 2008. And a vertified multispecialty supplier and pioneer seller in Alibaba more than 19 years.



Email: saleen@yh114.cn
WhatsApp: +8618218409072
Email: michael@yh114.cn
WhatsApp: +8618666086366

Tel: 020-87056506
After-Sales Service: yinghetech001@gmail.com
Shanghai Branch Tel: 021-31269312
Email: liujundong211@sohu.com

Head Office Address:
Room 712, 7th Floor, Meixing Building, No.101, Dexing Road, Pengshang, Baiyun District, Guangzhou

Factory Address:
Room 101, Building 5, No.50, Qixinggang Road, Luogang, Junhe Street, Baiyun District, Guangzhou City, China

Last revision date: 2025.10

Yinghe 瀛和®
WWW.YINGHEVIP.COM
WWW.YINGHECOLOR.COM

YINGHE
ELECTRONIC INSTRUMENTS CO.,LTD

瀛和电子设备有限公司

OPPORTUNITY HERE, BE SUCCESSFUL WITH US

GLOBAL
OVERSEAS WAREHOUSES



一站式服务 One Stop Service

ABOUT US



CCTV interview



Alibaba opening ceremony



Posed for a photo with Jack Ma

YINGHE HISTORY AND BUSINESS MODEL:

YINGHE ELECTRONIC INSTRUMENTS CO., LTD is the only international equipment China supermarket which has a cross-border e-commerce platform with over 130 warehouses all over the world. Our company was established in 2002. After several years of the development. YINGHE has become a well known modern enterprise with high-tech equipment at home and abroad. The scale of the company, products and service in China are second to none. Our products are sold well to more than 200 countries and regions of the world.

ENTERPRISE PHILOSOPHY:

Crisis enterprising, learning, innovation, teamwork culture idea.

ENTERPRISE VISION:

To build the first cross-border international equipment city of AMAZON pattern in the world; To set up the company services, warehouses, and the product display centers all over the world.



ENTERPRISE VALUES:

Adhering the concept of customer first, opportunity here, be successful with us!
Let the customer and supplier with YINGHE together to success.

ENTERPRISE MISSION:

Let the science and technology serve the happy life of mankind.

Global

OVERSEAS WAREHOUSE







Global delivery · International freight · sea freight · International air transport

Africa

Nigeria · Tanzania · Kenya · South Africa · Uganda
Angola · Zambia · Cameroon · Madagascar · And so on

Asia

Philippines · Thailand · Indonesia · Malaysia · Bangladesh
Turkey · India · Kuwait · Vietnam · And so on

The Americas

America · Mexico · Peru · Colombia · Argentina
Brazil · Chile · Canada · Ecuador · And so on

Europe

Russia · Britain · France · Spain · Italy
Germany · Poland · Belgium · Switzerland · And so on

CATALOGUE
CATÁLOGO

01 LARGE FORMAT PRINTER & DTF PRINTER & UV DTF PRINTER

Large format printer YH-1800A 01-02
Large format printer YH-1900F 03-04
Large format printer YH-1900C 05-06
Large format printer YH-1900I 07-08
Large format printer YH-2002A 09-10
Large format printer YH-3200G 11-12
Large format printer YH-3204W i3200 13-14
High speed solvent printer 15-16
YH-L8S solvent printer 17-18
YH-A3 DTF printer 19-20
YH-700 DTF printer 21-22
YH-S700 DTF printer 23-24
YH-704W I3200 DTF printer 25-26
A3 UV DTF printer 27-28
YH-600 UV DTF printer 29-30

02 SUBLIMATION PRINTER & FLAG PRINTING MACHINE & EMBROIDERY MACHINE & UV FLATBED PRINTER

High speed sublimation printer 31-32
4/6 heads digital sublimation printer 33-34
Digital printing machine 35-36
YH oil heat roller transfer machine 37-38
Sublimation flag printing machine 39-40
Sublimation flag printing machine 41-42
Single-head embroidery machine 43-44
Double-head embroidery machine 45-46
YH-DTG-450 printer 47-48
YH-A3 UV flatbed printer 49-50
YH-6090 UV flatbed printer 51-52
YH-UV9060A UV flatbed printer 53-54
UV flatbed printer YH-2513C 55-56
Intelligent UV printer 57-58

03 ONEPASS UV & CONTOUR CUTTING PLOTTER & LAMINATING MACHINE & HEAT PRESS

Mini onepass digital printer 59-60
Onepass UV digital printer 61-62
Digital corrugated box printer 63-64
Trademark cutting plotter 65-66
Trademark contour cutting plotter 67-68
Trademark contour cutting plotter 69
Contour cutting plotter(ARMS) 70
Reflective film engraving machine 71-72
A2 laminating machine 73
Hot/Cold laminating machine 74
1680 laminating machine 75-76
Heat press machine 77-78
YH-80*100 heat press machine 79
YH-450V+ paper cutting machine 80

04 OTHER MACHINE

Laser engraving machine 81-82
Laser engraver and cutter 83-84
Laser marking machine 85-86
Fiber laser cutting machine YH-2513G 87-88
AD CNC engraver 89-90
Wood CNC router 91-92
Double color offset printer 93-94
Nail art machine 95-96
Screen printing machine 97-98
Hot foil stamping machine YH-8025 99-100
PVC card printer 101-102
Handheld fiber laser welding machine 103-104
Printhead 105
Film&Ink&Banner 106
Transfer printing & Cutting film 107
Lighting box 108

Large format printer YH-1800A



Features



Epson printhead from Japan | Micro spray printing accuracy | VSDI variable ink droplet technology | Multiple machines only require one computer | Edge feathering intelligent printing | Diamond quality is super stable

Application



Product parameter

Model	YH-1800A
Print head	Epson XP600 1*PC
Printing speed	20m²/h (Draft) 15m²/h(Production) 10m²/h(Quality)
Paper feeding width	1850mm
Color	4 Color CMYK
RIP software	Maintop/Photoprint
Compatible ink	Eco-solvent ink/Water-based ink/Sublimation ink etc.
Auto media take-up system	Equipped
Operation system	WindowsXP/Win7/Win10/Win11
Printing media	PP/Photo paper/Vinyl sticker/Flex banner etc.
Printing resolution	1440DPI
Cleaning of printhead	Automatic
Working environment	15°C-30°C
Relative humidity	40%-60%
Power	500-2500W
Heating system	Automatic
Weight	170/200KGS
Package size	2780*740*640mm(L*W*H)

Parámetros del producto

Modelo	YH-1800A
Cabeza de impresión	Epson XP600 1*PC
Velocidad de impresión	20m²/h (Borrador) 15m²/h (Producción) 10m²/h (Calidad)
Anchura de alimentación del papel	1850mm
Color	4 Color CMYK
Software RIP	Maintop/Photoprint
Tinta compatible	Tinta de ecosolvente/Tinta a base de agua/Tinta de sublimación, etc.
sistema de auto - suministro de tinta	Equipado
Sistema operativo	WindowsXP/Win7/Win10/Win11
Medio de impresión	PP/Papel fotográfico/Calcomanía de vinilo/Bandera de flex, etc.
Resolución de impresión	1440DPI
Limpieza de la cabeza de impresión	Automática
Entorno de trabajo	15°C-30°C
Humedad relativa	40%-60%
Potencia	500-2500W
Sistema de calefacción	Automático
Peso	170/200KGS
Tamaño del empaque	2780*740*640mm(L*W*H)

Large format printer YH-1900F



Features



High Efficiency

High printing efficiency and fast printing speed



High Stability

Printing is fast, and the roller adopts the latest technology for more stability



High Resolution

High printing resolution



Multi-Media

Multiple machines only require one computer

Application









Product parameter

Model	YH-1900F
Print head	I3200 E1
Number of printhead	2*PCS
Max. printing width	1890mm
Printing speed	20m²/h; 15m²/h; 10m²/h
Voltage	AC 220V, 50-60Hz
Power	700-2500W
Package size	2910*750*640mm(L*W*H)
Weight	200KGS
Printer size	2837*455*1300mm(L*W*H)
Printer weight	140±5%(kg)
Boards	Senyang boards
Color	CMYK 4 color/CMYK LCLM 6 color
Compatible ink	Eco-solvent ink/ Water-based ink/ Sublimation ink etc.

Operating system	WinXP/Win7/Win10
Printing resolution	1440DPI
Cleaning of printhead	Automatic
Heating system	Front/Back
Drying system - Infrared	Equipped
Drying system - Fan	Equipped
Auto media take-up system	Equipped
Platform suction control	Equipped
Lifting system	Equipped
Working environment	15°C-30°C
Relative humidity	40%-60%
RIP software	Maintop/Photoprint (Optional)
Printing media	PP/Backlit film/Photo paper/ Movable self-adhesive vinyl/ Car sticker/Coated banner/ Flag cloth/Heat transfer paper/ Flex banner Wallpaper Canvas/ Chinese art paper

Parámetros del producto

Modelo	YH-1900F
Cabezal de impresión	I3200 E1
Cabezales de impresión	2*PCS
Ancho máx. de impresión	1890mm
Velocidad de impresión	20m²/h; 15m²/h; 10m²/h
Voltaje	AC 220V, 50-60Hz
Potencia	700-2500W
Tamaño del paquete	2910*750*640mm(L*W*H)
Peso	200KGS
Tamaño de la impresora	2837*455*1300mm(L*W*H)
Peso de la impresora	140±5%(kg)
Placas	Senyang boards
Color	CMYK 4 color/ CMYK LCLM 6 color
Tinta compatible	Tinta de ecosolvente Tinta a base de agua Tinta de sublimación, etc.

Sistema operativo	WinXP/Win7/Win10
Resolución de impresión	1440DPI
Limpieza de la cabeza de impresión	Automática
Sistema de calefacción	Frontal/Trasero
Sistema de secado - Infrarrojos	Equipado
Sistema de secado - Ventilador	Equipado
Sistema de recogida automática de medios	Equipado
Control de succión de la plataforma	Equipado
Sistema de elevación	Equipado
Entorno de trabajo	15°C-30°C
Humedad relativa	40%-60%
Software RIP	Maintop/Photoprint (Opcional)
Medio de impresión	PP/Película retroiluminada/Papel fotográfico/ Vinilo autoadhesivo removible/ Calcomanía para coches/Lona recubierta/ Tela para banderas/Papel de transferencia térmica/ Lona flexible/Papel tapiz/Lienzo/ Papel de arroz chino

Large format printer YH-1900C



Details



Application



Product parameter

Model	YH-1900C
Print head	I3200 E1 / I3200 A1
Number of printhead	1*PC / 2*PCS
Max. printing width	1890mm
Color	4 color CMYK
Boards	Hoson boards
Drying system - Infrared	Optional
Drying system - Fan	Equipped
Auto media take-up system	Equipped
Platform suction control	Equipped
Lifting system	Unequipped
Compatible ink	Eco-solvent ink/Water-based ink/ Sublimation ink etc.
Printing media	PP/Backlit film/Photo paper/ Self-adhesive vinyl Car sticker/Coated banner Heat transfer paper/Flex banner Wall paper/Canvas/Art paper

Printing resolution	1440DPI
Cleaning of printhead	Automatic
Heating system	Front/Back
Working environment	15°C-30°C
Relative humidity	40%-60%
RIP software	Photoprint/Maintop
Operating system	WinXP/Win7/Win10
Voltage	AC 220V, 50-60Hz
Power	600-2500W
Package size	2910*750*640mm(L*W*H)
Weight	200KGS
Printer size	2837*455*1300mm(L*W*H)
Printer weight	140±5%(kg)
Printing speed	30m²/h (Draft mode) 20m²/h (Production) 12m²/h (Quality mode)

Parámetros del producto

Modelo	YH - 1900C
Cabeza de impresión	I3200 E1 / I3200A1
Cabezal de impresión	1*PC / 2*PCS
Ancho máx. de impresión	1890mm
Color	4 color CMYK
Tarjetas	Tarjetas Hoson
Sistema de secado - Infrarrojos	Opcional
Sistema de secado - Ventilador	Equipado
Sistema automático de recolección de soporte	Equipado
Control de succión	Equipado
Sistema de elevación	No equipado
Tinta compatible	Tinta ecolvente/Tinta a base de agua/ Tinta de sublimación, etc.
Media de impresión	PP/Película retroiluminada/Papel fotográfico/Vinilo autoadhesivo Calcomanía para coche/Banner recubierto/Papel de transferencia térmica/Flex banner/Papel de pared/ Lienzo/Papel de arte

Resolución de impresión	1440DPI
Limpieza de la cabeza de impresión	Automática
Sistema de calefacción	Frontal/Trasero
Entorno de trabajo	15°C-30°C
Humedad relativa	40%-60%
Software RIP	Photoprint/Maintop
Sistema operativo	WinXP/Win7/Win10
Voltaje	AC 220V, 50-60Hz
Potencia	600-2500W
Tamaño del paquete	2910*750*640mm(L*W*H)
Peso	200KGS
Tamaño de la impresora	2837*455*1300mm(L*W*H)
Peso de la impresora	140±5%(kg)
Velocidad de impresión	30m²/h (borrador) 20m²/h (producción) 12m²/h (calidad)

Large format printer YH-1900I



• Features



Epson printhead from Japan | Micro spray printing accuracy | VSDI variable ink droplet technology | Multiple machines only require one computer | Edge feathering intelligent printing | Diamond quality is super stable

• Sample display



Product parameter

Model	YH-1900I
Print head	Epson I3200 (XP600 is optional)
Printing speed	30m²/h (Draft)
	20m²/h (Production)
	12m²/h (Quality)
Max. feeding width	1890mm
Color	4 Color CMYK
Printing resolution	450/540/600/720/1080/1440(DPI)
Compatible ink	Eco-solvent ink / Water-based ink / Sublimation ink etc.
Printing media	PP / Photo paper / Vinyl / Car sticker / Flex banner / Tarpaulin

Parámetros del producto

Modelo	YH-1900I
Cabeza de impresión	Epson I3200 (XP600 is optional)
Velocidad de impresión	30m²/h (Borrador)
	20m²/h (Producción)
	12m²/h (Calidad)
Ancho máx. de impresión	1890mm
Color de tinta	4 Color CMYK
Resolución de impresión	450/540/600/720/1080/1440 (DPI)
Tinta Compatible	Eco-solvent ink / Water-based ink / Sublimation ink etc.
Medio de impresión	PP / Photo paper / Vinyl/Car sticker / Flex banner / Tarpaulin

Large format printer YH-2002A



• Details



• Application



Product parameter

Model	YH-2002A
Print head	I3200 / I1600 (E1/A1) *2PCS
Printing media	PP / Photo paper / Heat transfer paper / Flex banner / Car sticker
Feed width	Platform width is 2100mm,and the maximum printing width is 2000mm.
Inkjet technology	Piezoelectric inkjet technology for on-demand ejection
Working environment	Temp: 18°C-30°C Humidity: 40%-60%RH
Color	4 color CMYK
Equipment weight	Net weight 220kg; Gross weight 292kg
Interface	Gigabit Ethernet port
Ink capacity	4 Colors: 1.5L*4/color
RIP software	Maintop (Photoprint optional)
Power supply	AC 220V, 50Hz-60Hz
Power specifications	1950W (Dryer 4920W)
Equipment size	3033*730*1497mm(L*W*H)
Packing size	3110*770*840mm(L*W*H)

Parámetros del producto

Modelo	YH-2002A
Cabezal de impresión	I3200 / I1600 (E1/A1) *2PCS
Medios de impresión	PP / Papel fotográfico / Papel térmico de transferencia / Banner flexible / Calcomanía para coche
Ancho de alimentación	El ancho de la plataforma es de 2100mm, y el ancho máximo de impresión es de 2000mm.
Tecnología de inyección de tinta	Tecnología de inyección de tinta piezoeléctrica para expulsión a demanda
Entorno de trabajo	Temp: 18°C-30°C Humedad: 40%-60%RH
Color	4 color CMYK
Peso del equipo	Peso neto 220kg; Peso bruto 292kg
Interfaz	Puerto Ethernet Gigabit
Capacidad de la botella de tinta	4 Colors: 1.5L*4/color
Software RIP	Maintop (Photoprint opcional)
Fuente de alimentación	AC 220V, 50Hz-60Hz
Especificaciones de potencia	1950W (Secador 4920W)
Tamaño del equipo	3033*730*1497mm(L*W*H)
Tamaño de empaque	3110*770*840mm(L*W*H)

Large format printer YH-3200G



Features



Epson printhead from Japan

Micro spray printing accuracy

VSDI variable ink droplet technology

Multiple machines only require one computer

Edge feathering intelligent printing

Diamond quality is super stable

Sample display



Product parameter

Model	YH-3200G
Print head	Epson DX5/XP600/i3200 2*PCS
Max. width	3250mm
Ink	ECO-DYE-UV-Sublimation ink
Media	PP Synthetic Paper, Backlit, Flex banner, Photographic Paper, Transfer Paper and so on
Print resolution/speed	4 pass: 46m²/h; 6 pass: 30m²/h; 8 pass: 23m²/h
RIP software	Maintop V5.3, 5.5 Photoprint, Topaz, Seeget Wasatch
Operation environments	Temperature: 20°C-35°C; Humidity: 35%-65%RH
Dimensions of packing	4700*1000*860mm(L*W*H)
Dimensions of printer	4800*900*1700mm(L*W*H)
Net weight	500KGS
Gross weight	550KGS

Parámetros del producto

Modelo	YH-3200G
Cabezal de impresión	Epson DX5/XP600/i3200 2*PCS
Anchura máx.	3250mm
Tinta	Tinta ECO-DYE-UV-Sublimación
Soporte	Papel Sintético PP, Backlit, Banner Flex, Papel Fotográfico, Papel de Transferencia, etc.
Resolución/Speed de impresión	4 paso: 46m²/h; 4 paso: 46m²/h; 8 paso: 23m²/h
Software RIP	Maintop V5.3, 5.5, Photoprint, Topaz, Seeget Wasatch
Entorno de operación	Temperatura: 20°C-35°C; Humedad: 35%-65%RH
Dimensiones del empaque	4700*1000*860mm(L*W*H)
Dimensiones de la impresora	4800*900*1700mm(L*W*H)
Peso neto	500KGS
Peso bruto	550KGS

Large format printer YH-3204W i3200



• Details







• Application







Product parameter

Item model		YH-3204W I3200
Print head		Epson I3200-E1*4PCS
Print speed		2pass: 120m²/h; 3pass: 80m²/h; 4pass: 60m²/h
High printing quality		Three intelligent eclosion print functions; VSD technology
Media heater		Front/back/drying fan
Media take-up device		Strong Rolling take-up device
Drying system		Drying system (option)
Interface		USB port
RIP software		Maintop 6.0 (Photoprint, Topaz, Seeget Wasatch optional)
Voltage		AC 110V+/-10%, AC 220V+/-10%, 50-60Hz
Operation environments		Temp: 20-35°C, Humidity: 35%-65%RH
Power		600W (printing), 800W (platfoam), 2200W (drying)
Dimensions of packing		4960*1000*900mm (L*W*H)
Height of worktable		1050mm
Gross weight		750KGS
Ink	Sort	Eco Solvent ink, Water Based ink, Sublimation ink
	Capacity	4 Colors: 2.5L*4/color
Media	Max. width	3250mm
	Thickness	1.5-8mm adjustable
	Max. roll weight	200KGS
	Sort	PP synthetic paper, vinyl sheet, film, coated paper, acid proof paper banner, canvas etc.,

Parámetros del producto

Modelo del artículo		YH-3204W I3200
Cabezal de impresión		Epson I3200-E1*4PCS
Velocidad de impresión		2paso: 120 m²/h; 3paso: 80 m²/h; 4paso: 60 m²/h
Alta calidad de impresión		Tres funciones inteligentes de impresión por eclosión; tecnología VSD
Calefactor de medio		Ante/trasero/ventilador de secado
Dispositivo de recogida de medio		Dispositivo de enrollco con fuerte tracción
Sistema de secado		Sistema de secado (opcional)
Interfaz		Puerto USB
Software RIP		Maintop 6.0 (Photoprint, Topaz, Seeget Wasatch opcionales)
Voltaje		AC 110V+/-10%, AC 220V+/-10%, 50-60Hz
Entornos de operación		Temp: 20-35°C, Humedad: 35%-65%RH
Potencia		600W (impresión), 800W (espuma de plataforma), 2200W (secado)
Dimensiones del embalaje		4960*1000*900mm (L*W*H)
Altura de la mesa de trabajo		1050mm
Peso bruto		750KGS
Tinta	Tipo	Tinta ecosolvente, tinta a base de agua, tinta de sublimación
	Capacidad	4 Colors: 2.5L*4/color;
Medio	Ancho máx.	3250mm
	Espesor	Ajustable de 1.5-8mm
	Peso máx. del bobina	200KGS
	Tipo	Papel sintético PP, láminas de vinilo, películas, papel recubierto, pancartas de papel a prueba de ácido, lonas, etc.

High speed solvent printer



Product features

★ Features precise ink bleeding control technology, ensuring smoother image quality.

★ One piece guide rail, stronger beam for the carriage, improving the printing carriage's stability and precision.

★ Industrial-grade winding and feeding system ensures high-precision printing without wrinkling.

★ Using high power Leadshine servo motor and ink cartridge system, made the high-speed printing more stable.

Product parameter

Model	YH-3204/YH-3208
Print head	Konica 512i/Konica1024i
Ink droplet	30pl
Print head qty	4/8*PCS
Color	4 color CMYK
Resolution	720DPI
Adjustable height	1-10mm
Max. print width	3.2m
Ink type	Solvent ink
Print interface	USB
Material	PVC flex banner/Vehicle Wrap Advertising/One-way vision
Photo file format	TIFF/JPEG/PDF
Printing process	Maintop direct output
Cleaning system	Automatic cleaning system
Feeding&take-up system	Auto feeding &take-up system
Software	Maintop/Photoprint/Wasatch
Package size	4800*1030*1580mm(L*W*H)
Gross weight	950KGS
Print speed - 2 pass	8 print head 260-460m²/h
Print speed - 3 pass	8 print head 180-300m²/h

Parámetros del producto

Modelo	YH-3204/YH-3208
Cabezal de impresión	Konica 512i/Konica1024i
Volumen de gota	30pl
Cantidad de cabezales de impresión	4/8*PCS
Color	4 color CMYK
Resolución	720DPI
Altura ajustable	1-10mm
Anchura máx. de impresión	3.2m
Tipo de tinta	Tinta solvente
Interfaz de impresión	USB
Material	PVC flex banner/Vehicle Wrap Advertising/One-way vision
Formatos de imagen	TIFF/JPEG/PDF
Proceso de impresión	Salida directa de Maintop
Sistema de limpieza	Sistema de limpieza automático
Sistema de alimentación y recolección	Sistema de alimentación y recolección automático
Software	Maintop/Photoprint/Wasatch
Tamaño del paquete	4800*1030*1580mm(L*W*H)
Peso bruto	950KGS
Velocidad de impresión - 2 paso	8 cabezales de impresión 260-460 m²/h
Velocidad de impresión - 3 paso	8 cabezales de impresión 180-300 m²/h

YH-L8S solvent printer



Product parameter

Model	YH-L8S
Print head model	KM 512i / KM 1024i Printhead
Print head Qty	4/8*PCS
Print head height	2-100mm Above Media Adjustable
Print width	3200mm
Print thickness	1.5-3mm Material thickness
Media drying	Infrared heating
Color	C/M/Y/K
Platform type	Suction platform
Printing control	Printer manager
Software	Maintop/PhotoPrint
Computer demand	Gigabit network interface/USB2.0
File format	TIFF/JPEG/PDF

Computer system	Win7/Win8/win10
Input voltage	AC 220V(+10%), 50-60Hz<15A
Operating power	<3500W
Machine size	4430*790*1170mm(L*W*H)
Packing size	4820*1000*1570mm(L*W*H)
Weight	≤820KGS
Media type	Vinyl, Flex,PolyesterBacklit Film, Window Film, etc
Environment	A clean and dust-free environment with no bright light and good visibility Optimal temperature 15-30°C relative humidity 30-70%
Miscellaneous function	Automatic height measurement, Automatic collision avoidance, Automatic electrostat-ic removal, Vacuum constant pressure ink supply.

Product parameter

Printhead	High speed mode	Standard mode	High-quality mode	Ink Color
KM 512i-30PL 8 Heads	480x360 DPI 2 pass 230m²/h	480x720 DPI 3 pass 160m²/h	480x1080 DPI 4 pass 120m²/h	● ● ● ●
KM 1024i-13PL 8 Heads	540x360 DPI 2 pass 220m²/h	540x720 DPI 3 pass 150m²/h	540x1080 DPI 4 pass 120m²/h	● ● ● ●
KM 1024i-13PL 8 Heads	480x360 DPI 1 pass 480m²/h	480x720 DPI 2 pass 260m²/h	480x1080 DPI 3 pass 174m²/h	● ● ● ●

Application







Parámetros del producto

Modelo	YH-L8S
Modelo de la cabeza de impresión	Cabeza de impresión KM 512i / KM 1024i
Cantidad de cabeceras de impresión	4/8*PCS
Altura de la cabeza de impresión	Ajustable entre 2-100mm sobre el soporte
Ancho de impresión	3200mm
Espesor de impresión	Espesor del material: 1.5-3mm
Secado de medio	Calentamiento por infrarrojos
Color	C/M/Y/K
Tipo de plataforma	Plataforma de succión
Control de impresión	Printer Manager
Software	Maintop/PhotoPrint
Demanda de ordenador	Interfaz de red Gigabit/USB 2.0
Formato de archivo	TIFF/JPEG/PDF

Sistema de computadora	Win7/Win8/win10
Voltaje de entrada	AC 220V(+10%), 50-60Hz<15A
Poder de funcionamiento	<3500W
Tamaño de la máquina	4430*790*1170mm(L*W*H)
Tamaño del embalaje	4820*1000*1570mm(L*W*H)
Peso	≤820KGS
Tipo de soporte	Vinilo, Flex, Película para Iluminación Trasera de Poliéster, Película para Ventanas, etc
Entorno	Un entorno limpio y libre de polvo, sin luz brillante y con buena visibilidad. Temperatura óptima 15-30°C,humedad relativa 30-70%
Función miscelánea	Medida automática de altura Evasión automática de colisiones Eliminación automática de estática Alimentación de tinta a presión constante por vacío

YH-A3 DTF Printer



• Consumables



• Application



Product parameter

Model	YH-A3 DTF printer	YH-Powder shaking machine
Size	144*72*65cm	79*60*81cm
Weight	70KGS	47KGS
Printing size	300mm	
Print head	Epson XP600 2*PCS	
Color	CMYK+W	
Printing speed	(4/6/8/pass) 4-5m²/h	
RIP software	Maintop	
Printing resolution	1440DPI	
Operation system	WindowsXP / Win7 / Win10 / Win11	
Printing height	5mm	
Available ink	Pigment Ink	
Printing media	PET Film	
Voltage	110V/220V	
Picture format	BMP / TIF/ JPG / PDF	

Parámetros del producto

Modelo	Impresora DTF YH-A3	YH-Máquina agitadora de polvo
Tamaño	144*72*65cm	79*60*81cm
Peso	70KG	47KG
Tamaño de impresión	300mm	
Cabezal de impresión	Epson XP600 2*PCS	
Color	CMYK+W	
Velocidad de impresión	(4/6/8/paso) 4-5m²/h	
Software RIP	Maintop	
Resolución de impresión	1440DPI	
Sistema operativo	WindowsXP / Win7 / Win10 / Win11	
Altura de impresión	5mm	
Tinta compatible	Tinta Pigmentada	
Medio de impresión	Película PET	
Voltaje	110V/220V	
Formato de imagen	BMP / TIF / JPG / PDF	

YH-700 DTF printer



• Consumables







• Application









Product parameter

Model	YH-700 DTF	**Model**	YH-Powder shaking machine
Printhead	Epson XP600*2PCS (I3200 Optional)	**Temp**	0-400°C (be adjustable)
Print speed	4pass: 7m²/h 6pass: 5m²/h 8pass: 3m²/h 4pass: 12m²/h 6pass: 8m²/h 8pass: 6m²/h	**Speed**	40m/h
Color	CMYK+W	**Power**	5KW
Rip software	Maintop	**Noise**	30db averange
Resolution	1440DPI	**Voltage**	220V, 60Hz
Size	179*72*63cm(L*W*H)	**Size**	136*96*120cm(L*W*H)
Operating system	WindowsXP/Win7		
Print width	600mm		
Ink type	Pigment Ink		
Print material	PET Film		
Voltage	AC 110V(±10%), AC 220V(±10%), 60Hz 5KW		
Heating device	Pre print-post print type 3 heater (can be controlled separately)		
Picture format	BMP/TIF/JPG/PDF		
Environment temperature	Temp: 20°C-28°C Humidity: 40%-70%RH		

Parámetros del producto

Modelo	YH-700 DTF	**Modelo**	YH-Máquina de mezcla de polvo
Cabezal de impresión	Epson XP600*2PCS (I3200 Optional)	**Temperatura**	0-400°C (ser ajustable)
Velocidad de impresión	4paso: 7m²/h 6paso: 5m²/h 8paso: 3m²/h 4paso: 12m²/h 6paso: 8m²/h 8paso: 6m²/h	**Velocidad**	40m/h
Color	CMYK+W	**Potencia**	5KW
Software de RIP	Maintop	**Ruido**	30db en promedio
Resolución	1440DPI	**Voltaje**	220V, 60Hz
Tamaño	179*72*63cm(L*W*H)	**Tamaño**	136*96*120cm(L*W*H)
Sistema operativo	WindowsXP/Win7		
Anchura de impresión	600mm		
Tipo de tinta	Tinta Pigmentada		
Material de impresión	Película PET		
Voltaje	AC 110V(±10%), AC 220V(±10%), 60Hz 5KW		
Dispositivo de calentamiento	Tipo 3 de calentador previo - posterior a la impresión (puede controlarse por separado)		
Formato de imagen	BMP/TIF/JPG/PDF		
Entorno de temperatura	Temp: 20°C-28°C Humedad: 40%-70%RH		

YH-S700 DTF printer



Product parameter

Model		YH-S700		
Max. print width		650mm		
Print head		Epson I3200 2*PCS	Epson I3200 4*PCS	Epson I3200 8*PCS
Produce mode		18m²/h	28m²/h	62m²/h
Resolution mode		12m²/h	24m²/h	36m²/h
High resolution mode		10m²/h	20m²/h	28m²/h
Ink type		DTF ink		
Take - up system		Heavy take - up system		
High resolution		VSD technology		
Media heater		Front/Back heating (seperate control)		
Operation environment		Temp: 15°C-30°C, Humidity: 35%-65%RH		
Guide rail		Famous brand: THK from Japan		
Interface		1000Mbit/s		
Voltage		AC 110V(±10%), 220V(±10%), 60Hz 5KW		
RIP software		Maintop 6.1		
Power		4000W	6500W	10000W
Dimensions		2900*1100*1500mm (printer) / 3000*1500*1400mm (powder shaker)		
Weight		150kg (printer) / 300kg (powder shaker)		
Media	**Width**	700mm (printer) / 1200mm (powder shaker)		
	Thickness	2-8mm (printer) / 1.5mm (powder shaker)		
	Max. weight	75kg (printer) / 150kg (powder shaker)		
	Sort	Ironing materials/Clothing hot stamping offset stock/Lettering film		

Consumables



Application



T-shirt | Working clothes | Body pillow | Canvas bag

Parámetros del producto

Modelo		YH-S700		
Ancho máx. de impresión		650mm		
Cabezal de impresión		Epson I3200 2*PCS	Epson I3200 4*PCS	Epson I3200 8*PCS
Modo de producción		18m²/h	28m²/h	62m²/h
Modo de resolución		12m²/h	24m²/h	36m²/h
Modo de alta resolución		10m²/h	20m²/h	28m²/h
Tipo de tinta		Tinta DTF		
Sistema de recogida		Sistema de recolecta pesada		
Alta resolución		VSD technology		
Calefactor de medios		Front/Back heating(can becontrolled separately)		
Entorno de operación		Temp: 15°C-30°C, Humidity: 35%-65%RH		
Carril guía		Famous brand: THK from Japan		
Interfaz		1000Mbit/s		
Voltaje		AC 110V(±10%), 220V(±10%), 60Hz 5KW		
Software RIP		Maintop 6.1		
Potencia		4000W	6500W	10000W
Dimensiones de la impresora		2900*1100*1500mm (impresora) / 3000*1500*1400mm (sacudidor de polvo)		
Peso neto		150kg (impresora) / 300kg (sacudidor de polvo)		
Medios	**Ancho**	700mm (impresora) / 1200mm (sacudidor de polvo)		
	Espesor	2-8mm (impresora) / 1.5mm (sacudidor de polvo)		
	Peso máx.	75kg (impresora) / 150kg (sacudidor de polvo)		
	Tipo	Materiales de Planchado/Rollo de Offset para Estampado en Caliente de Ropa/Película para Letras		

YH-704W I3200 DTF printer



Product parameter

Model	YH-704W-I3200 4H
Print head	I3200
Number of print heads	2/4*PCS
Print resolution/speed	4 pass: 24m²/h; 6 pass: 16m²/h; 8 pass: 12m²/h
Ink color	CMYK+W
Ink capacity	5 Colors: 1.8L*5/color
Media maximum width	730mm
Applicable media	PET Film
Interface	USB
Operating system	Win7/Win10
RIP software	Maintop V6.1, PrintFactory, Photoprint, Topaz, Seeget Wasatch
Voltage	AC 110V-220V, 50-60Hz
Operation environments	Temp: 20°C-35°C, Humidity: 35%-65%RH
Power	Printing 2000W; heating 8000W
Height of worktable	1050mm
Dimensions of printer	1900*750*1500mm(L*W*H)
Dimensions of shaker	2400*1160*1120mm(L*W*H)
Dimensions of printer packing	2090*830*730mm(L*W*H)
Dimensions of shaker packing	2200*1260*1260mm(L*W*H)

Details



Application



Parámetros del producto

Modelo	YH-704W-I3200 4H
Cabezal de impresión	I3200
Número de cabezales de impresión	2/4*PCS
Resolución de impresión/velocidad	4 paso: 24m²/h; 6 paso: 16m²/h; 8 paso: 12m²/h
Color de tinta	CMYK+W
Capacidad de tinta	5 Colores: 1.8L*5/color
Anchura máxima del soporte	730mm
Soporte aplicable	Película PET
Interfaz	USB
Sistema operativo	Win7/Win10
Software RIP	Maintop V6.1 PrintFactory, Photoprint, Topaz, Seeget Wasatch
Voltaje	AC 110V-220V, 50-60Hz
Entornos de operación	Temp: 20°C-35°C; Humedad: 35%-65%RH
Potencia	Impresión 2000W; calefacción 8000W
Altura de la mesa de trabajo	1050mm
Dimensiones de la impresora	1900*750*1500mm(L*W*H)
Dimensiones del agitador	2400*1160*1120mm(L*W*H)
Dimensiones del empaque de la impresora	2090*830*730mm(L*W*H)
Dimensiones del empaque del agitador	2200*1260*1260mm(L*W*H)

A3 UV DTF printer



Product introduction

- ★ Small footprint, easy installation and cargo transportation
- ★ Rubber roller, better lamination effect and more durable
- ★ Printing/laminating 2 in 1,improving work effciency
- ★ Air-cooled UV system saves energy/space

Sample show



Phone case | Toy | Glass material | Safety hat | Water cup

Product parameter

Name	A3 UV DTF printer
Print head	Epson XP600 3*PCS
Printing width	300mm
Resolution	1080DPI
Color	C M Y K W+Varnish
Ink	UV DTF ink
RIP software	Photoprint
Power supply	AC 110V-220V, 50-60Hz
Printing speed	6 pass: 3 m²/h; 8 pass: 2 m²/h
UV curing system	Ar cooling system+LED UV lamp(Two)
Power consumption	1200W
Machine weight	100KGS
Packing weight	130KGS
Machine size	120*50*116cm(L*W*H)
Package size	152*73*75cm(L*W*H)

Parámetros del producto

Nombre	Impresora UV DTF A3
Cabezal de impresión	Epson XP600 3*PCS
Anchura de impresión	300mm
Resolución	1080DPI
Color	C M Y K W+Varnish
Tinta	Tinta UV DTF
Software RIP	Photoprint
Suministro de poder	AC 110V-220V, 50-60Hz
Velocidad	6 paso: 3 m²/h; 8 pass: 2 m²/h
Sistema de curado UV	Sistema de refrigeración de aire + Lámpara UV LED (Dos)
Consumo de energía	1200W
Peso de la máquina	100KGS
Peso de embalaje	130KGS
Tamaño de la máquina	120*50*116cm(L*W*H)
Tamaño del paquete	152*73*75cm(L*W*H)

YH-600 UV DTF printer



Printhead	High-speed mode	Standard mode	High-Quality mode	Ink color
EPSON I3200 U1 3 heads	720X1200DPI 4 pass 6m²/h	720X1800DPI 6 pass 4m²/h	720X2400DPI 8 pass 3m²/h	

• Application



• Detail display



• Main features

- ★ Simple structure for easy installation
- ★ Equipped with 3 heads I3200 - U1, high resolution printing
- ★ Intelligent tension bar collecting waste film
- ★ The high - precision aluminum main body and high - precision platform (high resolution printing)

Product parameter

Inkjet technology	Micro piezo-electric inkjet
Printing width	600mm
Material weight	Max. roll weight 75kg
Ink type	UV DTF ink
Color configuration	CMYK+White+Varnish
Media type	PET/PVC
Board type	BYHX
RIP software	Maintop or Photoprint optional
Head height	0-10mm adjustable
Medium specification	Double motor device with the automatic damper

Image format	TIFF/JPEG/EPS/PDF
Operating system	Win7/10, 64bits
Data interface	Network interface
Max. power	15A, 2KW
Power parameter	AC 220V(±5%), 50Hz-60Hz
Humidity	35%-65%RH(no condensing)
Temperature	20°C-35°C (59-90°F)
Machine size/weight	2020*1000*1520mm(L*W*H)/ Net weight 260KGS
Package size/weight	2050*860*650mm(L*W*H)/ Gross weight 320KGS

Parámetros del producto

Tecnología de inyección de tinta	Inyección de tinta micro piezoeléctrica
Anchura de impresión	600mm
Peso del material	Peso máx. del rollo 75kg
Tipo de tinta	Tinta UV DTF
Configuración de color	CMYK+Blanco+Barniz
Tipo de soporte	PET/PVC
Tipo de placa	BYHX
Software RIP	Maintop o Photoprint Opcional
Altura de la cabeza	Ajustable de 0-10mm
Especificación del soporte	Dispositivo de doble motor con damper automático

Formato de imagen	TIFF/JPEG/EPS/PDF
Sistema operativo	Win7/10, 64bits
Interfaz de datos	Network interface
Potencia máx.	15A, 2KW
Parámetro de potencia	AC 220V(±5%), 50Hz-60Hz
Humedad	35%-65%RH(no condensing)
Temperatura	20°C-35°C (59-90°F)
Tamaño/peso de la máquina	2020*1000*1520mm(L*W*H)/ Peso neto 260KGS
Tamaño/peso del paquete	2050*860*650mm(L*W*H)/ Peso bruto 320KGS

High speed sublimation printer



Application



Product parameter

Model		YH2008	YH2012
Max. print width		1900mm	
Printhead		Epson I3200 8*PCS	Epson I3200 12*PCS
Print speed	Max. print	300m²/h	480m²/h
	Resolution mode	260m²/h	400m²/h
	High resolution mode	180m²/h	230m²/h
Ink type	Sort	Sublimation Ink	
	Capacity	5L continuous bulk / Intelligent empty ink supply system	
Interface		USB 3.0 port	Dual USB 2.0/Gigabit ethernet interface
Power		7800W	10500W
Media width		2000mm	1900mm
Media thickness		1.5-8mm adjustable	
Media max. roll weight		150KGS	
Media type		Sublimation paper,Flag	
High printing quality		VSD technology	
Media heater		Pre/Post heater (Optional)	
Media take-up device		Double motor double air shaft automatic paper retracting system	
Drying system		Infrared ray drying system	
Guide rail		THK From Japan	
RIP software		Maintop 6.1 professional photoprint 19	
Voltage		AC 110V±10%, AC 220V±10 %, 50-60Hz	
Operation environment		Temp: 15°C-30°C, humidity: 35%-65%RH	
Dimensions of printer		3460*1460*1660mm(L*W*H)	
Weight		660KGS	

Parámetros del producto

Modelo		YH2008	YH2012
Cabezal de impresión		1900mm	
Máx. impresión		Epson I3200 8*PCS	Epson I3200 12*PCS
Velocidad de impresión	Máx. impresión	300m²/h	480m²/h
	Modo de resolución	260m²/h	400m²/h
	Modo de alta resolución	180m²/h	230m²/h
Tinta	Tipo	Tinta de sublimación	
	Capacidad	Sistema de suministro de tinta vacía inteligente / a granel continuo de 5L	
Interfaz		Puerto USB 3.0	Interfaz dual USB 2.0/Gigabit ethernet
Potencia		7800W	10500W
Anchura del soporte		2000mm	1900mm
Espesor del soporte		Ajustable de 1.5-8mm	
Peso máx. del rollo de soporte		150KGS	
Tipo de soporte		Papel de sublimación, bandera	
Alta calidad de impresión		Tecnología VSD	
Calefactor del soporte		Calefactor previo/ posterior (opcional)	
Dispositivo de recogida del soporte		Sistema automático de retracción de papel de doble motor y doble eje de aire	
Sistema de secado		Sistema de secado por rayos infrarrojos	
Carril guía		Marca famosa: THK de Japón	
Software RIP		Maintop 6.1 impresión fotográfica profesional 19	
Voltaje		AC 110V±10%, AC 220V±10%, 50-60Hz	
Entornos de operación		Temp: 15°C-30°C, humedad: 35%-65%HR	
Dimensiones de la Impresora		3460*1460*1660mm(L*W*H)	
Peso		660KGS	

4/6 heads digital sublimation printer



• Application



Product parameter

Model		YH-1804	YH-1806
Max. print		1800mm	
Printhead		I3200 A1 4/6*PCS, 400 nozzles*8 lines*1,high quality up to 3200DPI	
Print speed	Produce	160m²/h	250m²/h
	Resolution	85m²/h	200m²/h
	High resolution	55m²/h	150m²/h
Ink type	Sort	Sublimation Ink	
	Capacity	1.5L empty ink/5L continuous bulk ink supply system	
Media	Width	1800mm	
	Thickness	1.5-8mm adjustable	
	Max. roll weight	75KGS	150KGS
	Sort	Sublimation paper, polyester flag banner cloth	
High printing quality		VSD technology	
Media heater		Pre/Post heater (Optional)	
Media take-up device		Double motor double air shaft automatic paper retracting system	
Drying system		Infrared ray drying system	
Guide rail		THK From Japan	
Voltage		AC 110V+10%, AC 220V+10 %, 50/60+1Hz	
Operation environment		Temp: 15°C-30°C, humidity: 35%-65%RH	
Interface		1000 Mbit/s	USB 3.0
RIP Software		Maintop V5.3, Photo print	Maintop 6.1 Pro, photoprint 19
Power		5000W	7800W
Dimensions of Printer		3500*1300*1500mm(L*W*H)	3300*1200*1400mm(L*W*H)
Dimensions of Packing		3640*1400*1650mm(L*W*H)	3450*1300*1550mm(L*W*H)
Net Weight		350KGS	450KGS
Weight		400KGS	550KGS

Parámetros del producto

Modelo		YH-1804	YH-1806
Impresión máx.		1800mm	
Cabezal de impresión		I3200 A1 4/6*PCS, 400 boquillas*8 líneas*1, alta calidad hasta 3200DPI	
Velocidad de impresión	Producir	160m²/h	250m²/h
	Resolución	85m²/h	200m²/h
	Alta resolución	55m²/h	150m²/h
Tipo de tinta	Clasificar	Tinta de sublimación	
	Capacidad	Sistema de suministro de tinta vacía de 1,5 L/tinta continua a granel de 5 L	
Medio	Ancho	1800mm	
	Grosor	1.5-8mm ajustable	
	Peso máximo del rollo	75KGS	150KGS
	Clasificar	Papel de sublimación, tela de poliéster para pancartas	
Alta calidad de impresión		Tecnología VSD	
Calentador de material		Precalentador/Postcalentador (opcional)	
Recogedor de material		Sistema de retracción automática de papel con doble motor y doble eje de aire	
Sistema de secado		Sistema de secado por rayos infrarrojos	
Carril guía		THK de Japón	
Voltaje		AC 110V+10%, AC 220V+10 %, 50/60+1Hz	
Entorno de funcionamiento		Temp: 15°C-30°C, humidity: 35%-65%RH	
Interfaz		1000 Mbit/s	USB 3.0
Software RIP		Maintop V5.3, impresión fotográfica	Maintop 6.1 Pro, fotoimpresión 19
Alimentación		5000W	7800W
Dimensiones de la impresora		3500*1300*1500mm(L*W*H)	3300*1200*1400mm(L*W*H)
Dimensiones del embalaje		3640*1400*1650mm(L*W*H)	3450*1300*1550mm(L*W*H)
Peso neto		350KGS	450KGS
Peso		400KGS	550KGS

Digital printing machine

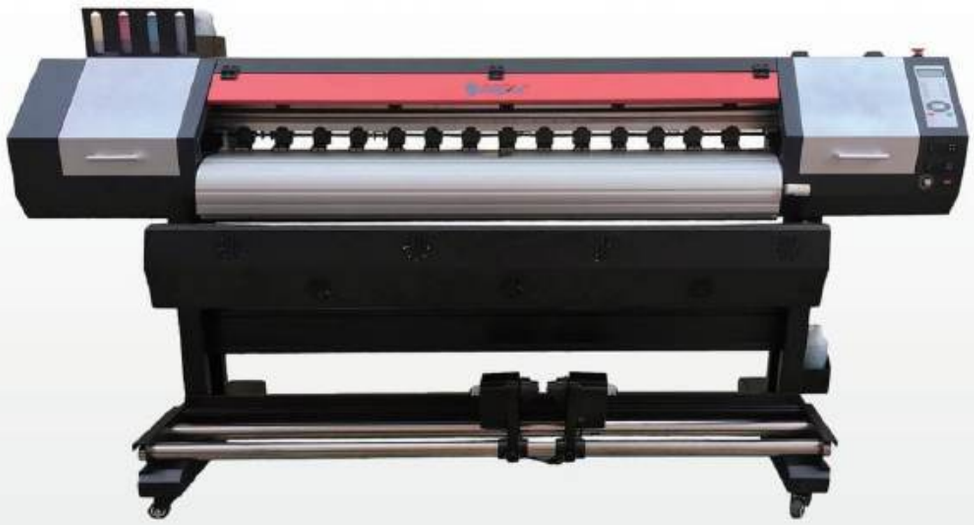

• Sublimation solution



Calander sublimation machine D



Calander sublimation machine A



3200mm Calander sublimation machine

• Application



Product parameter

Model		1600EH/1800EH	1600ES/1800ES
Max. feeding width		1680/1880mm	1680/1880mm
Quantity of printhead		2*PCS	2*PCS
Printhead type		Epson DX5/DX7	Epson I3200
Print speed		2 pass: 53m²/h	2 pass: 60m²/h
		3 pass: 35m²/h	3 pass: 40m²/h
		4 pass: 30m²/h	4 pass: 30m²/h
Media type		PP/Photo paper/Frontlit backlit film/Flex banner/Canvas /Car sticker/Thermal transfer paper/Reflective material	
RIP software		Maintop	
Power		AC 110V±10%, AC 220V±10%, 50-60Hz	
Ink	**Color type**	(CMYK) ECO Solvent Ink/Sublimation Ink/Water Based Ink	
	Ink supply	1.2L large ink container continuous ink supply system, constant pressure type two ink program	
Specific function	**Automatic nozzle cleaning system**	Automatic cleaning, with anti-blocking flash spray function and moisturizing function	
	Carriage height	Distance medium 2-8mm stepless adjustable	
	Heating system	Embedded intelligent heating system	
	Anti sticking paper	Combined type all resistance and anti sticking paper	
	USB transfer interface	Hi-USB 2.0	
Size	**Packing dimension**	2900*880*650mm(L*W*H)	
	Gross weight	340KGS	

Parámetros del producto

Modelo		1600EH/1800EH	1600ES/1800ES
Ancho máx. de alimentación		1680/1880mm	1680/1880mm
Cantidad de cabezales de impresión		2*PCS	2*PCS
Tipo de cabezal de impresión		Epson DX5/DX7	Epson I3200
Velocidad de impresión		2 paso: 53 m²/h	2 paso: 60 m²/h
		3 paso: 35 m²/h	3 paso: 40 m²/h
		4 paso: 30 m²/h	4 paso: 30 m²/h
Tipo de medio		PP/Papel fotográfico/Película frontal trasera iluminada/ Banner flexible/Lienzo/Calcomanía para coche/Papel de transferencia térmica/Material reflectante	
Software RIP		Maintop	
Potencia		AC 110V±10%, AC 220V±10%, 50-60Hz	
Tinta	**Tipo de color**	(CMYK) Tinta de solvente ecológico/ Tinta de sublimación/Tinta a base de agua	
	Suministro de tinta	Sistema de suministro de tinta continuo con recipiente de tinta grande de 1.2L, tipo de presión constante con dos programas de tinta	
Función específica	**Automatic nozzle cleaning system**	Limpieza automática, con función de pulverización flash anti - bloqueo y función de humectación	
	Altura del carril	Distancia media de 2-8mm ajustable sin escalones	
	Sistema de calefacción	Sistema de calefacción inteligente embebido	
	Papel antiadherente	Tipo combinado de resistencia total y antiadherencia de papel	
	Interfaz de transferencia USB	Hi-USB 2.0	
Tamaño	**Dimensiones del embalaje**	2900*880*650mm(L*W*H)	
	Peso bruto	340KGS	

YH oil heat roller transfer machine



• Detail display






• Application






Product parameter

Workstation size(cm)	210*1800
Power(KW)	13K
Temperature range(°C)	0-260
Voltage(V)	380V
Weight(KG)	1100

Parámetros del producto

Tamaño de la estación de trabajo(cm)	210*1800
Potencia(KW)	13K
Rango de temperatura(°C)	0-260
Voltaje (V)	380V
Peso(KG)	1100

Main features

- ★ Voltage: Single-phase 220V or Three-phase 380V
- ★ Chrome-plated Rollers
- ★ Automatic Edge Trimming for Felt
- ★ Pneumatic Pressure Application
- ★ Workstation Length: 1 meter
- ★ PVC Conveyor Belt
- ★ Multilingual (Chinese and English) Panel
- ★ Felt
- ★ Air Expanding Shaft*1
- ★ Color: Light Blue

Sublimation flag printing machine



• Product features

Stable performance | Real materials | Advanced equipment | Fine workmanship | Complete specifications | Quality assurance

• Sample display







Product parameter

Product model	YH-1801	YH-1802
Print head	I3200	I3200
Head qty	1*PC	2*PCS
Print speed	4 pass: 21m²/h; 6 pass: 15m²/h	4 pass: 42m²/h; 6 pass: 30m²/h
Printing accuracy	360*720, 360*1080, 720*720, 1440*1440(DPI)	
Print width	1800mm	
Media type	Double sided through the flag weaving, satin, silver carving cloth, mesh cloth	
Ink	Special ink for thermal sublimation	
Color	C, M, Y, K	
Ink supply system	Continuous ink supply system,each color can use 2000ml	
Head cleaning	Lift type automatic cleaning and scraping system	
Head height	From 2-5mm stepless adjustable	
Heating system	Advanced color display system with constant temperature heating	
Feeding system	Special textile cloth placing system	
Data transfer interface	Portable transmission	
Work environment	Temp: 18°C-28°C; Humidity: 50%-80%RH	
Power supply	Rated voltage: AC 110V/220V	
Package size	3350*740*1250mm(L*W*H)	
Weight	400KGS	

Parámetros del producto

Modelo del producto	YH-1801	YH-1802
Cabezal de impresión	I3200	I3200
Cantidad de cabezales	1*PC	2*PCS
Velocidad de impresión	4 paso: 21m²/h; 6 paso: 15m²/h	4 paso: 42m²/h; 6 paso: 30m²/h
Precisión de impresión	360*720, 360*1080, 720*720, 1440*1440(DPI)	
Ancho de impresión	1800mm	
Tipo de material	Doble cara a través del tejido de bandera, satén, tela de plata tallada, tela de malla	
Tintas	Tinta especial para sublimación térmica	
Color	C, M, Y, K	
Sistema de suministro de tinta	Sistema de suministro continuo de tinta, cada color puede usar 2000ml	
Limpieza del cabezal	Sistema automático de limpieza y raspado con elevación	
Altura del cabezal	Ajustable de 2-5 mm sin escalonamiento	
Sistema de calentamiento	Sistema avanzado de visualización a color con calentamiento a temperatura constante	
Sistema de alimentación	Sistema especial para colocar telas textiles	
Interfaz de transferencia de datos	Transmisión portátil	
Entorno de trabajo	Temp: 18°C-28°C; humedad: 50%-80%RH	
Fuente de alimentación	Voltaje nominal: AC 110V/220V	
Tamaño del paquete	3350*740*1250mm(L*W*H)	
Peso	400KGS	

Sublimation flag printing machine



• Product features



• Sample display



Product parameter

Model		YH-2004QZ
Print head		Epson 5113/4720/i3200 printhead
Max. print width		2000mm
Thickness		Adjustable 1.5-5mm
Max. roll weight		150KGS
Media		Digital flag banner/flag material
Ink	**Sort**	Sublimation dye ink
	Capacity	5L
Print speed		130m²/h(Produce); 100m²/h(Resolution); 80m²/h(High Resolution)
High printing quality		VSD technology
Media heater		Integrated oven
Media take-up device		Front and rear motor automatic paper receiving system
Drying system		Integrated oven
Guide rail		famous brand: HIWIN from Taiwan
Interface		Gigabit network card
RIP software		Maintop 6.1 Photoprint support
Voltage		AC 110V±10%, AC 220V±10%, 50/60±1Hz
Operation environments		Temp: 15°C-30°C, Humidity: 35%-65%RH
Power		7500W
Dimensions of printer(L*W*H)		3800*1200*1550mm(L*W*H)
Net weight		300KGS

Parámetros del producto

Modelo		YH-2004QZ
Cabezal de impresión		Cabezal de impresión Epson 5113/4720/i3200
Ancho Máx. de impresión		2000mm
Espesor		Ajustable de 1.5-5mm
Peso Máx. del bobina		150KGS
Media		Material para banderas digitales/banderas
Tinta	**Tipo**	Tinta de sublimación al color
	Capacidad	5L
Velocidad de impresión		130m²/h (producción); 100m²/h (resolución); 80m²/h (alta resolución)
Alta Calidad de impresión		Tecnología VSD
Calefactor de medios		Horno Integrado
Dispositivo de recogida de medios		Sistema Automático de Recogida de Papel con Motores Frontales y Traseros
Sistema de secado		Horno Integrado
Guía de rail		Marca famosa: HIWIN de Taiwán
Interfaz		Tarjeta de Red Gigabit
Software RIP		Compatible con Maintop 6.1 Photoprint
Voltaje		AC 110V±10%, AC 220V±10%, 50/60±1Hz
Entornos de operación		Temp: 15°C-30°C, Humedad: 35%-65%RH
Potencia		7500W
Dimensiones de la impresora		3800*1200*1550mm(L*W*H)
Peso neto		300KGS

Single-head embroidery machine



Product parameter

Model	YH-901CS/YH-1201CS/YH-1501CS	YH-901CL/YH-1201CL/YH-1501CL
Needle	9/12/15	9/12/15
Head	1*PC	1*PC
N.W	350KGS	350KGS
Emb.area	360*510mm	360*1200mm
Meas	750*750*600mm(L*W*H)	1600*750*800mm(L*W*H)

Parámetros del producto

Modelo	YH-901CS/YH-1201CS/YH-1501CS	YH-901CL/YH-1201CL/YH-1501CL
Aguja	9/12/15	9/12/15
Cabezal	1*PC	1*PC
Peso neto	350KGS	350KGS
Área de bordado	360*510mm	360*1200mm
Medidas	750*750*600mm(L*W*H)	1600*750*800mm(L*W*H)

Product features

★ Main feature

1. Suitable for flat embroidery, cap embroidery and garments embroidery
2. Pattern auto rotation with 180 after changing cap frame unit
3. Convenient power failure recovery embroidery function, prevent embroidery half-way
4. Prevent off-cause misalignment
5. Maximum speed 1200 RPM
6. LCD display showing real time stitching
7. Memory size 20000000 stitches matched with 200 patterns
8. USB and network transmission supported
9. Emergency stop.Prevent accident
10. Suto start and color change, 200 time color change settled
11. Thread break detection and prevention
12. Perfect pattern stitch compensation, customers could change the stitch eidth(+/-0.3mm) according to needs
13. ElectricityAC 86-264Vinput available, adapt to any unstable electricity environment
14. The machine adopts DC36V power switch, eminently safe
15. Machine maximum power consumption 150w
16. Automatic external thread winding device
17. Can add infrared grating protection device and laser cutting device

Detail display



Application



Double-head embroidery machine





Three-heads Four-heads Multi-heads

• Sample show





• Product introduction

★ Automatic computerized embroidery machine adopts Top Wisdom / DAHAO electronic control, high speed handpieces, linear guide and high quality components.

Product parameter

Model	YH-902W/YH-1202W/YH-1502W
Needles	9/12/15
Heads	2*PCS
Speed	1000 needles/min
Working size	Flat embroidery: 400*500mm
	Cap embroidery: 75*150mm
L/W/H	1600/700/1600mm; 1600/1200/1600mm
Stitch length	0.1-1.27mm
Memory	1 million stitches Max 2million; 99 designs in memory
	USB/DST/DSB/ZSK/read files in Tajima(DST0)
File format	DST
Power	220V/50Hz
Power consumption	500W
Weight	450KGS
Packing size	1460*1120*1600mm(L*W*H)

Parámetros del producto

Modelo	YH-902W/YH-1202W/YH-1502W
Agujas	9/12/15
Cabezal	2*PCS
Velocidad	1000 puntadas/minuto
Área de trabajo	Bordado plano: 400*500mm
	Bordado en gorras: 75*150mm
L/W/H	1600/700/1600mm; 1600/1200/1600mm
Tamaño de la puntada	0.1-1.27mm
Memoria	1 millón de puntos. Máx. 2 millones; 99 diseños en memoria
	USB/DST/DSB/ZSK/leer archivos en Tajima (DST0)
Formato de archivo	DST
Voltaje/frecuencia	220V/50Hz
Consumo de potencia	500W
Peso	450KGS
Tamaño de empaque	1460*1120*1600mm(L*W*H)

YH-DTG-450 printer





Product details



Main features

- ★ Supports AI print design,making personalized printing smarter
- ★ Adjustable platform to accommodate different print models
- ★ Standard print width of 40*50cm, meeting the needs of independent element patterns
- ★ High-speed print head, white and color print simultaneously, higher productivity
- ★ Flexible and simple operation, print one piece at a time, produce on demand
- ★ Compact box design with an integrated body, lightweight and portable, small footprint,strong environmental adaptability

Product parameter

Printhead type		Epson I1600
Printhead quantity		2*PCS
Print area		Standard size: 40*50cm
Print media		100% cotton fabric, Cotton-spandex blend<5%, Light colored synthetic fiber
Ink supply method		Capillary ink supply
Ink type		Pigment ink
Print resolution		720*1200DPI
Print speed		A3 Size, 30-35 pieces/hour, White and color simultaneous output
Interface		Gigabit ethernet port, USB data port
Power requirements		AC 220V+5%, 10A, 50Hz+1
Power consumption		3000W
Machine dimensions		1050*950*1280mm(L*W*H)
Package dimensions		1140*1140*825mm(L*W*H)
Net weight		200KGS
Gross weight		280KGS
File formats		PDF, PNG, JPG, BMP, EPS, TIF
Operating environment	**On state**	Temperature: 15°C-32°C (59°F-90°F); 20°C (68°F) recommended Humidity: 35%-80% relative humidity (no condensation) Suggest keep the machine on standby for 24 hours recommended
	Off state	Temperature: 5°C-40°C (41°F-104°F) Humidity: 35%-80% relative humidity (no condensation) If need to turn off the machine for ≥3 days Suggest keep the machine on standby for 24 hours recommended

Parámetros del producto

Tipo de cabezal de impresión		Epson I1600
Cantidad de cabeza de impresión		2*PCS
Área de impresión		Área de Impresión Estándar: 40*50cm
Soporte de impresión		Tela de algodón 100%, algodón-espandex, Mezcla<5%, Fibra sintética de color claro
Método de suministro de Tinta		Suministro de Tinta por capilar
Tinta		Tinta pigmentada
Resolución de impresión		720*1200dpi
Velocidad de impresión		Tamaño A3, 30 - 35 piezas/hora, Salida simultánea de blanco y color
Interfaz		Puerto de ethernet gigabit, Puerto de datos USB
Requisitos de energía		CA 220V+5%, 10A, 50Hz+1
Consumo de energía		3000W
Dimensiones de la máquina		1050*950*1280mm(L*W*H)
Dimensiones del paquete		1140*1140*825mm(L*W*H)
Peso neto		200KGS
Peso bruto		280KGS
Formatos de archivo		PDF, PNG, JPG, BMP, EPS, TIF
Entorno de operación	**Estado encendido**	Temperatura: 15°C - 32°C (59°F - 90°F); Recomendado 20°C (68°F) o superior. Humedad: 35% a 80% de humedad relativa (sin condensación).*1 Se recomienda dejar la máquina en standby durante 24 horas
	Estado apagado	Temperatura: 5°C - 40°C (41°F - 104°F). Humedad: 35% a 80% de humedad relativa (sin condensación).*1 Se recomienda apagar la máquina si va a estar inactiva durante ≥ 3 días (sin condensación).*1 Se recomienda dejar la máquina en standby durante 24 horas

YH-A3 UV flatbed printer



High quality printing

Multifunctional applications

High precision presentation

• Main features

- ★ White ink mixing circulation system makes ink flow smoother
- ★ Printhead with anti-collision system protects the printhead better
- ★ Infrared automatic detection of media height
- ★ Ink imported from Taiwan ensures bright colors
- ★ Automatic ink shortage alarm system prevents ink from running out

• Sample show

- ★ Building materials industry: such as tiles, glass
- ★ Home decoration industry: such as wood boards, cabinets, handicrafts
- ★ Electronic products industry: such as mobile phone cases
- ★ Advertising industry: such as signs, display boards, PP boards, etc.
- ★ Leather industry: leather bags, genuine leather, fake leather

• Application



Product parameter

Model	A3UV
Printing size	50*30cm
Printing color	CMYK+W+V(single head)
Printing height	0-13cm
Machine size	62*156*98cm(L*W*H)
Software	RIIN Photoprint
Board	HOSON
Print head	DX7
Operation system	Win7/Win10
Net weight	95KGS

• Detail display



Parámetros del producto

Modelo	A3UV
Tamaño de impresión	50*30cm
Color de impresión	CMYK+W+V(cabezal único)
Altura de impresión	0-13cm
Tamaño de la máquina	62*156*98cm(L*W*H)
Software	RIIN Photoprint
Placa base	HOSON
Cabezal de impresión	DX7
Sistema operativo	Win7/Win10
Peso neto	95KGS

YH-6090 UV flatbed printer



Fast speed | High print quality | Multi-functional application

Main features

★ Supports dual-head CMYK+W five-color; CMYK+W+V six-color high-speed synchronous printing

★ White ink stirring and circulation system for smoother ink dispensing

★ Anti-static system for higher quality prints

★ Infrared automatic detection of media height

★ Ink recirculation system to more effectively prevent ink splatter

Application





Product details





Product parameter

Model	6090-U1
Printing size	60*90cm
Printing colors	CMYK+W (Double Heads)
	CMYK+W+V (Three Heads)
Printing height	0-13cm
Machine size	152*165*72cm(L*W*H)
Printing speed	4pass 12 square meters
	6pass 10 square meters
	8pass 8 square meters
Software	RuiCai,Photoprint
Resolution	720*1200*3200DPI
Print head	Epson i3200-U1
Operating system	Win7, Win10
Total weight	200KGS

Parámetros del producto

Modelo	6090-U1
Tamaño de impresión	60*90cm
Colores de impresión	CMYK+W (Doble Cabezal)
	CMYK+W+V (Tres Cabezales)
Altura de impresión	0-13cm
Tamaño de la máquina	152*165*72cm(L*W*H)
Velocidad de impresión	4 pasos: 12 metros cuadrados
	6 pasos: 10 metros cuadrados
	8 pasos: 8 metros cuadrados
Software	RuiCai, Photoprint
Resolución	720*1200*3200DPI
Cabezal de impresión	Epson i3200-U1
Sistema operativo	Win7, Win10
Peso total	200KGS

YH-UV9060A UV flatbed printer



• Features

- High precision UV printing
- Automatic cleaning
- Bidirectional printing
- Automatic height measurement
- Imported silent guide rail
- White ink auto-circulation

• Application







Product parameter

Model	YH-UV9060A
Printing Size	900mm*600mm
Print Head	TX800 Printhead
Printer Size	1960*1400*1200mm(L*W*H)
Packing Size	2100*1525*905mm(L*W*H)
Print Thickness	0-150mm
Power	500-800W
Power Supply	AC220/110±10 50-60Hz
Working Condition	Temperature : 20 - 25℃; Humidity : 15 - 25%
Weight	260KGS

Parámetros del producto

Modelo	YH-UV9060A
Tamaño de Impresión	900mm*600mm
Cabezal de Impresión	Cabezal TX800
Tamaño de la Impresora	1960*1400*1200mm(L*W*H)
Tamaño del Embalaje	2100*1525*905mm(L*W*H)
Espesor de Impresión	0-150mm
Potencia	500-800W
Fuente de Alimentación	AC220/110±10 50 - 60Hz
Condición de Trabajo	Temperatura: 20 - 25℃; Humedad: 15 - 25%
Peso	260KGS

UV flatbed printer YH-2513C



• Application







• Product details







Product features

★ Variable color configuration,can be added to 8 colors
★ UV Ink CMYK+white ink and varnish
★ Print thickness: 1-100mm
★ Toshiba print head ,the smallest ink drop 5pl (Easy maintenance)
★ Speed up to 12-15sqm/hr
★ 2500mm*1300mm actual flatbed with 4 vacuum zones
★ High precision screw guidings ensure the precise printing
★ Automatic cleaning system
★ USB 3.0 connector
★ LED lamp curable system
★ Applied materials : Ceramic, Acrylic, Wood, Craft, Painting, Glass, Metal, Leather, PVC, ABS, etc

Características del producto

★ Configuración de color variable, se puede ampliar hasta 8 colores
★ Tinta UV CMYK + tinta blanca y barniz
★ Grosor de impresión: 1-100mm
★ Cabezal de impresión Toshiba, gota de tinta más pequeña de 5pl (Fácil mantenimiento)
★ Velocidad de hasta 12-15 m²/hora
★ Mesa plana real de 2500mm*1300mm con 4 zonas de vacío
★ Guías de tornillo de alta precisión garantizan una impresión precisa
★ Sistema de limpieza automático
★ Conector USB 3.0
★ Sistema de curado con lámpara LED
★ Materiales aplicables: cerámica, acrílico, madera, manualidades, pinturas, vidrio, metal, cuero, PVC, ABS, etc.

Intelligent UV printer



Wireless operation free printing with mobile phones

Using supporting APP of printer to experience intelligent printing.



Step one
Scan the QR code into applet

Step two
Choose your mobile phone model

Step three
Choose photo or image to print, and adjust position and size well

Step four
Preview printing effect, make sure then send print order

Step five
Choose HD/E mbossed print

Product details



Product parameter

Model	YH -98	**Printing method**	Intelligent mobile App print
Print head	EPSON GEN 10 XP600	**Net weight**	26KGS
Printing area	20*15cm	**Ink color**	CMYKWW(six colors)
Printhead number	One	**Height measurement**	Automatic infrared height measure
Printing height	0-6cm	**Control main-board**	Domestic intelligent main-board
Resolution	1440*2880DPI	**Machine size**	55*37*37cm(L*W*H)

Parámetros del producto

Modelo	YH - 98	**Método de impresión**	Impresión inteligente por aplicación móvil
Cabezal de impresión	EPSON GEN 10 XP600	**Peso neto**	26KGS
Área de impresión	20*15cm	**Color de tinta**	CMYKWW(six colors)
Número de cabezales de impresión	One	**Medición de altura**	Medición automática de altura por infrarrojos
Altura de impresión	0-6cm	**Placa base de control**	Placa base inteligente nacional
Resolución	1440*2880DPI	**Tamaño de la máquina**	55*37*37cm(L*W*H)

Mini onepass digital printer



• Application







• Product details







Product parameter

Printhead technology	HP-A3
Printing speed	28m/min
Number of nozzles	59136(4224x14)
Printhead quantity	1 piece
Printhead width	300mm
Printing software	Single pass RIP
Supporting documents	TIFF、BMP、JPEG、CDR、PSD、JPG
Variable data	Support printing one-dimensional code,QR code,serial number, radom number,support data and image.

Printing resolution	300 / 400 / 600 / 900 / 1200DPI
Data connection	Network line interface
Operating system	Windows7 /windows8/Windows10/XP
Printing material	carton,writing paper,offset paper,kraft paper,degradable lunch container, coated paper,wood,handbag,and rice paper,etc.
Power requirement	50/60HZ,AC110/220V 800W
Operation environment	Temperature15-35°C Humidity20%-60%
Equipment size	850mm x 770mm x 650mm(L*W*H)

Parámetros del producto

Tecnología del cabezal de impresión	HP-A3
Velocidad de impresión	28m/min
Número de boquillas	59136(4224x14)
Cantidad de Cabezas de Impresión	1 Pieza
Anchura del cabezal de impresión	300mm
Software de impresión	RIP de un solo pase
Documentos admitidos	TIFF、BMP、JPEG、CDR、PSD、JPG
Datos variables	Admite la impresión de código unidimensional, código QR, número de serie, número aleatorio; admite datos e imágenes.

Resolución de impresión	300 / 400 / 600 / 900 / 1200DPI
Conexión de datos	Interfaz de línea de red
Sistema operativo	Windows7/Windows8/Windows10/XP
Material de impresión	cartón, papel de escritura, papel offset, papel kraft, papel desechable, contenedor de almuerzo desechable, papel recubierto, papel, madera, bolso y papel de arroz, etc.
Requisito de potencia	50/60HZ, 110/220VAC 800W
Entorno de operación	Temperatura:15 - 35°C; Humedad:20% - 60%
Tamaño del equipo	850mm x 770mm x 650mm(L*W*H)

Onepass uv digital printer



• Application







• Product details







Product parameter

Machine model	YH-D550
Printhead model	RICOH G5*4pcs CMYK
Printing height	1-106mm
Printing distance	1-5mm
Number of print lines	1-40lines
Printing speed	600x1200DPI 1-60m/min
Counters	10pcs
Ink color	UV CMYK (white for option)
Ink type	UV or water-based ink
Ink supply system	High-precision negative pressure ink supply
Printing material	Carton / Plastic / Metal Plate / Tube / Stone/ Glass / Electronic Components / Auto Parts / Industrial Chemical Packaging / Fast Food or Gift Packaging etc.
Printing content	Text / Time / Date / Pattern / Shift / Series number / Dynamic barcode / QR code / Dynamic database / Dynamic picture

Operating system	Windows
Display screen	12.1 inches PLC touch screen computer
Main motor	750W servo motor
Interface	USB, RS232, network port
Power supply	Input AC100-240V
Rated power	350W
Computer hard drive	64G
Operating environment	Temperature 0-45°C
Humidity	30-70%RH
Certifications	RoHS, CE
External interfaces	Optical eye, encoder, alarm light
Supported languages	More than 10 languages (Chinese, English, Arabic, German, Russian, Korean etc.)
Machine size	2000*400*750mm(L*W*H)
Package size	2200*650*800mm(L*W*H)
Weight	400KGS

Parámetros del producto

Modelo de máquina	YH-D550
Modelo de cabezal de impresión	RICOH G5*4 pcs CMYK
Altura de impresión	1-106mm
Distancia de impresión	1-5mm
Número de líneas de impresión	1-40 líneas
Velocidad de impresión	600x1200DPI 1 - 60m/min
Contadores	10 pcs
Color de tinta	UV CMYK (blanco opcional)
Tipo de tinta	Tinta UV o a base de agua
Sistema de suministro de tinta	Suministro de tinta de presión negativa de alta precisión
Material de impresión	Caja de cartón / Plástico / Chapa de metal / Tubo / Piedra / Vidrio / Componentes electrónicos / Partes de automóvil / Envasado de productos químicos industriales / Envasado de comida rápida o regalos, etc.
Contenido de impresión	Texto / Hora / Fecha / Patrón / Turno / Número de serie / Código de barras dinámico / Código QR / Base de datos dinámica / Imagen dinámica

Sistema operativo	Windows
Pantalla de visualización	Computadora con pantalla táctil PLC de 12.1 pulgadas
Motor principal	Motor servo de 750W
Interfaz	USB, RS232, puerto de red
Suministro de energía	Entrada de CA 100 - 240V
Potencia nominal	350W
Unidad de disco duro de la computadora	64G
Entorno de operación	Temperatura de 0 - 45°C
Humedad	30-70%RH
Certificaciones	RoHS, CE
Interfaces externas	Ojo óptico, codificador, luz de alarma
Idiomas admitidos	Más de 10 idiomas (chino, inglés, árabe, alemán, ruso, coreano, etc.)
Tamaño de la máquina	2000*400*750mm(L*W*H)
Tamaño del paquete	2200*650*800mm(L*W*H)
Peso	400KGS

Digital corrugated box printer



Application



Product parameter

Model	Corrugartor printer
Printing size	59cm*88.5cm*118cm
Number of printhead	2、3、4、6
Print color	K、C、M、Y
Nozzle type	HP
Print height	0 - 8CM (customizable)
Print accuracy	1200*300、1200*600
Print speed	10 m/min - 30 m/min
Printing platform	Partition honey combsuction platform
Medium type	Corrugated paper, carton, paper bags and other paper products
Material dimensions	Width 1.6M * length 2.0 m(customizable)
Rip software	RIIN
Working environment	Temperature: 20 - 32°C;Humidity: 40 - 70%
File format	TIFF、BMP、PDF、EPS、JPEG
Electrical requirements	AC220V: 50HZ; 5000W
Weight	450KGS
Size of equipment	1700*3685*1555mm(L*W*H)

Parámetros del producto

Nombre	Impresora de ondulado
Tamaño de impresión	59cm*88.5cm*118cm
Número de cabezales de impresión	2、3、4、6
Color de impresión	K、C、M、Y
Tipo de boquilla	HP
Altura de impresión	0 - 8CM (personalizable)
Precisión de impresión	1200*300、1200*600
Velocidad de impresión	10 m/min - 30 m/min
Plataforma de impresión	Plataforma de aspiración de panal de abejas por particiones
Tipo de medio	Papel ondulado, caja de cartón, bolsas de papel y otros productos de papel
Dimensiones del material	Anchura 1.6M * longitud 2.0 m (personalizable)
Software de desripado	RINE
Entorno de trabajo	Temperature: 20 - 32°C;Humidity: 40 - 70%
Formato de archivo	TIFF、BMP、PDF、EPS、JPEG
Requisitos eléctricos	AC220V: 50HZ; 5000W
Peso	450KGS
Dimensiones del equipo	1700*3685*1555mm(L*W*H)

Trademark cutting plotter



Product introduction

★ Adjusting cutting force and plotting speed at any time.
★ European popular large screen high bright display, clearly to operate.
★ USB interface optional, supporting plug in and off when power is on.
★ Serial port, large memory, quick off-line, CorelDRAW output directly.
★ Support many popular software at home and abroad.
★ Uniaue double cutter position, double pressing strips for processing different kinds of materials.

Application scope

★ Office decoration, graphics, wall decals.
★ Computer control, carve word, figure and sign on vinyl.
★ In banner printing industry, it is used to carve transfer, screen version, etc
★ Suitable for advertising, light box making, printing bags, reflective film cutting, banner production,exhibition version production, glass sandblasting. etc.

Application





Product details





Product parameter

Model	YH-360J	YH-720J	YH-870J	YH-1100J	YH-1350J
Max feeding width	360mm	720mm	870mm	1100mm	1350mm
Max cutting width	270mm	630mm	780mm	1000mm	1260mm
NW / GW	8 / 12KGS	11 / 20KGS	13 / 23KGS	15 / 27KGS	17 / 32KGS
Dimension	60.5*35*37mm	96*35*43mm	111*35*43mm	134*35*43mm	159*35*43mm
Stand	No	Optional	Yes	Yes	Yes
Interface	Serial (USB optional)				
Cutting tool	Imported hardness alloy steel blade				
Power	AC 90~260V				
Negtive pressure absorption functior	Yes				
Cutting blade soft landing	Yes				
Origin point setup	Yes				
Language format	DMPL / HPGL				

Parámetros del producto

Modelo	YH-360J	YH-720J	YH-870J	YH-1100J	YH-1350J
Anchura máxima de alimentación	360mm	720mm	870mm	1100mm	1350mm
Anchura máxima de corte	270mm	630mm	780mm	1000mm	1260mm
Peso neto / peso bruto	8 / 12KGS	11 / 20KGS	13 / 23KGS	15 / 27KGS	17 / 32KGS
Dimensiones	60.5*35*37mm	96*35*43mm	111*35*43mm	134*35*43mm	159*35*43mm
Soporte	No	Opcional	Yes	Yes	Yes
Interfaz	Interfaz serie (USB opcional)				
Herramienta de corte	Cuchilla de aleación de acero de dureza importada				
Potencia	CA 90 - 260V				
Función de absorción de presión negativa	Sí				
Aterrizaje suave de la cuchilla de corte	Sí				
Configuración del punto de origen	Sí				
Formato de lenguaje	DMPL / HPGL				

Trademark contour cutting plotter



Product introduction

★ The specialized industry modelling and mechanism design, the outword appearance more smooth & netuial,the structure more scientific and strong.

★ The imported punctures paper-roll with more friction force and more working life, and without any posiible deviation after long media cutting.

★ The whole-steel linear bearing pen-vehicle, with bigger cutting pressure and can be adjustable easily,with good heat dispersion.

★ The DSP processor, with more quickly operating speed, subdivieds the constant flow with low noise and stable system operation.

★ The worldwide first technology draws (or cut) with negtive direction function, save more cost and bring more using value for user.

★ The standard USB connection, the data transmission is stabler. Meanwhile with the U Flash memoray can used for output directly.

★ Built-inside closed compensation, acute angle compensation, which can be used directly from coredraw CAD or other design software.

★ The LED display with light backside, also easily changed between English and Chinese, with more simply operation.

Product parameter

Model	YH-1351C
Max material width	1350mm
Max cutting width	1240mm
Pinch roller	5
LCD	Touch LCD
Main board	Arms mainboard(auto)
Carriage	GC auto contour carriage
Contour cutting type	Auto contour
Cuting precision	±0.02mm
Feeding accuracy	5mm
Drive motor	Stepper motor
Stand	Included
Speed	800mm/s
Force	500g
Roller	Grit roller
Interface	COM+USB+U DISK
Command	HPGL
Software	Anycut(pro) / ARTCUT / CUT
	MASTER / CorelDRAW / Flexi12 / Signmaster Cut / Sign CUT
Input voltage	110-230V
Packing size	1640*360*430mm(L*W*H)
Operating system	WindowsXP / Windows Vista / Windows7 / WindowsS8 / MAG

Parámetros del producto

Modelo	YH-1351C
Anchura máxima del material	1350mm
Anchura máxima de corte	1240mm
Rodillo de sujeción	5
Pantalla LCD	Pantalla táctil LCD
Placa madre	Placa madre Arms(auto)
Carro	Carro de contorno automático GC
Tipo de corte de contorno	Contorno automático
Precisión de corte	±0.02mm
Precisión de alimentación	5mm
Motor de accionamiento	Motor paso a paso
Soporte	Incluido
Velocidad	800mm/s
Fuerza	500g
Rodillo	Rodillo de arena
Interfaz	COM+USB+U DISK
Comando	HPGL
Software	Anycut(pro) / ARTCUT / CUT
	MASTER / CorelDRAW / Flexi12 / Signmaster Cut / Sign CUT
Voltaje de entrada	110-230V
Tamaño del empaque	1640*360*430mm(L*W*H)
Sistema operativo	WindowsXP / Windows Vista / Windows7 / WindowsS8 / MAG

Desktop cutting plotter



Product parameter

Model item	YH-360
Paper width	360mm (A3)
Cutting width	300mm
Cutting speed	800m/s
Cutting force	500g
Stand	No stand
Gross weight	9.7KGS
Packing size (cm)	59cm*23.5cm*22cm(L*W*H)
Interface	USB port + SD card

Memory	1m
Command set	DMPL/HPGL
Power supply	AC 100V~AC 240V 50~60Hz
Working environment	5℃~35℃,5%~95% (Non Condens ation)
Compatible system	Windows XP / Windows Vista / Windows7(32bit& 64bit) / Mac
Software	Star cut

Parámetros del producto

Artículo del modelo	YH-360
Anchura del papel	360mm (A3)
Anchura de corte	300mm
Velocidad de corte	800m/s
Fuerza de corte	500g
Soporte	Sin soporte
Peso bruto	9.7KGS
Tamaño de envase (cm)	59cm*23.5cm*22cm(L*W*H)
Interfaz	Puerto USB + Tarjeta SD

Memoria	1m
Conjunto de comandos	DMPL/HPGL
Fuente de alimentación	AC 100V~AC 240V 50~60Hz
Entorno de trabajo	5℃~35℃, 5%~95% (Sin condensación)
Sistema compatible	Windows XP / Windows Vista / Windows7(32bit& 64bit) / Mac
Software	Corte estrella

Contour cutting plotter(ARMS)



Product parameter

Model	YH-630G	YH-1200G
Maximum paper feed width	730mm	1300mm
Maximum cutting width	630mm	1200mm
Stand	Included	
Motor	High speed stepping motor, micro-step driver	
Maximum cutting speed	500mm/s	
Cutting force	0-500g / 1000g(digital adjustment)	
Mechanical precision	0.01mm	

Repeatable precision	< +-0.1mm	
Plotter instruction	DM-PL / HP-GLAutomatic identification	
Interfaces	USB / Serial port, u-disc port	
Power supply	AC110V / 220V+10%,50Hz/60Hz	
Laser point positioning	ARMS (Automatical Registration Marks System)	
Noise at work	≤50 DB	
External dimension	1045*330*375mm	1590*330*375mm
Shipping weight	23KGS	33KGS

Parámetros del producto

Modelo	YH-630G	YH-1200G
Anchura máxima de alimentación del papel	730mm	1300mm
Anchura máxima de corte	630mm	1200mm
Soporte	Incluido	
Motor	Motor de Pasos de Alta Velocidad, Controlador de Micro-pasos	
Velocidad máxima de corte	500mm/s	
Fuerza de corte	0-500g / 1000g(Ajuste Digital)	
Precisión mecánica	0.01mm	

Precisión repetible	< +-0.1mm	
Instrucción del plotter	DM-PL / HP-GL, Identificación Automática	
Interfaces	USB / Puerto Serie, Puerto de U-disco	
Power supply	AC110V / 220V+10%,50Hz/60Hz	
Posicionamiento del punto láser	ARMS (Sistema de Marcas de Registro Automático)	
Ruido en el trabajo	≤50 DB	
Dimensiones externas	1045*330*375mm	1590*330*375mm
Peso de envío	23KGS	33KGS

Reflective film engraving machine



Product parameter

Model	YH1430	**Data language format**	Compatible with DM / PL, HP / GL Plotting Languages
Max engraving width	1230 mm	**Compatible software**	WenTai / SignMaster and other plotting software or CDR / AI design software
Max paper feed width	1430 mm	**Automatic contour cutting**	Optional
Max speed	1000 mm/s	**Motor**	Servo motor control system
Max pressure	1000g	**Steel roller**	9 pieces
Mechanical resolution	0.025mm/step	**Roller combination**	9 sets
Buffer memory capacity	1gb	**Power supply**	AC220V+15% <120W
Repeat precision	0.125mm	**Working environment temperature**	0 ~ 35°C
Data interface type	Compatible with USB 2. compatible with USB flash drive offline output		

Product details





Main features

★ Heavy-duty body design ensures the precision and stability of machine engraving.
★ High-precision steel spur wide spindle enables accurate transmission and effectively prevents deviation.
★ All-metal trolley supports long-term continuous operation, features excellent heat dissipation, and ensures smooth engraving.
★ Press wheel linkage design allows all press wheels to be lifted/lowered as a whole or individually, saving time and effort.
★ Servo control system achieves smooth engraving with high speed and low noise, perfectly balancing speed and precision.
★ Large-capacity cache supports offline engraving.
★ Directly reads cutting files from USB drives, eliminating the restriction of USB cables for convenience and efficiency.
★ Optional camera CCD contour cutting function enables precise positioning with strong resistance to external light interference.

Parámetros del producto

Modelo	YH1430	**Formato de lenguaje de datos**	Compatible con los lenguajes de trazado DM / PL y HP / GL
Anchura máxima de grabado	1230 mm	**Software compatible**	WenTai / SignMaster y otro software de trazado o software de diseño CDR/AI
Anchura máxima de alimentación de papel	1430 mm	**Corte de contorno automático**	Opcional
Velocidad máxima	1000 mm/s	**Motor**	Sistema de control de motor servo
Presión máxima	1000g	**Rodillo de acero**	9 piezas
Resolución mecánica	0.025mm/step	**Combinación de rodillos**	9 conjuntos
Capacidad de memoria de búfer	1Gb	**Fuente de alimentación**	AC220V+15% <120W
Precisión de repetición	0.125mm	**Temperatura del entorno de trabajo**	0 ~ 35°C
Tipo de interfaz de datos	Compatible con USB 2. compatible con salida sin conexión de unidad flash USB		

A2 Laminating machine



Product parameter

Model	YH-A2	Packing size	740*300*270mm(L*W*H)
Laminating width	+/44cm	Power supply	220v / 50Hz
Laminating thickness	0.1-5mm	Laminating temperature	0℃-180℃
Laminating speed	0.3-3m/min	Weight	7.1KGS

Parámetros del producto

Modelo	YH-A2	Tamaño de embalaje	740*300*270mm(L*W*H)
Anchura de laminación	+/44cm	Fuente de Alimentación	220v / 50Hz
Espesor de laminación	0.1-5mm	Temperatura de Laminación	0℃-180℃
Velocidad de laminación	0.3-3m/min	Peso	7.1KGS

Features

★ High quality

★ High efficiency and low cost.

★ Long life and low maintenance cost

★ Wide range application.

Hot/Cold laminating machine



Product parameter

Max.laminating width	650 / 480 mm
Max.laminating speed	1600 mm/min
Hot laminating temperature	60~160
Display	LCD
Power source	220V / 50Hz,110V / 60Hz
Power	1200W

Parámetros del producto

Anchura máxima de laminación	650 / 480 mm
Velocidad máxima de laminación	1600 mm/min
Temperatura de laminación en caliente	60~160
Pantalla	LCD
Fuente de alimentación	220V / 50Hz,110V / 60Hz
Potencia	1200W

1680 Laminating machine



• Application







• Product details







Product parameter

Model	YH-1680A
Type	Automatic
Max laminating width	1520mm
Laminating speed	0-10m/min
Operating temperature	0-120℃
Warm-up time	0-10Min
Diameter of paper tube	3 inches
Scope of suitable film thickness	10-250 um
Method of pressure adjustment	Pneumatic
Power	60W
Heating power	1500W
Packing size	198*63*68cm(L*W*H)
Weight	210KGS

Parámetros del producto

Modelo	YH-1680A
Tipo	Automático
Ancho máximo de laminación	1520mm
Velocidad de laminación	0-10m/min
Temperatura de funcionamiento	0-120℃
Tiempo de calentamiento	0-10Min
Diámetro del tubo de papel	3 inches
Espesor de película adecuado	10-250 um
Método de ajuste de presión	Neumático
Potencia del motor	60W
Potencia de calefacción	1500W
Tamaño del embalaje	198*63*68cm(L*W*H)
Peso	210KGS

Heat press machine



8 IN 1 HEAT PRESS MACHINE

YHT-2938
Weight: 28.4KGS
Package size: 54*46*45cm(L*W*H)
Voltage: 220V/1250W
Temperature range: 0-399°F/0-200°C
Time range: 0-999s



3838 HEAT PRESS MACHINE

YHT-3838
Weight: 24KGS
Package size: 67*46*44cm(L*W*H)
Voltage: 220V/1800W
Temperature range: 0-570°C
Time range: 0-999s



PEN PRESS MACHINE

YHB-C102S
Materials: Iron,thermite plate
LED display
Voltage: 110/220V
Power: 300W
Temperature range: 0-220°C
Time range: 0-999s
N.W/G.W: 9KGS/11KGS
Package size: 37*47*50cm(L*W*H)



CAP PRESS MACHINE

YHT-814
Hot stamping size: 140*80 mm
Voltage: 110V/220V
Time range: 0-999s
Temperature range: 0-299°C
Packing weight: 17KGS
Package size: 59.5*32.5*42cm(L*W*H)

Heat press machine



4060 HOT STAMPING MACHINE

Voltage: 110V/200V
Power: 1800W
Time: 0-999s
Temperature:0-299°C
Packing size:75*45.5*45cm(L*W*H)
Net Weight: 19.8KGS
Gross Weight: 20.5KGS



MUG PRESS MACHINE

YHT-110Z
Packing weight: 7KGS
Package size: 36*33*33cm(L*W*H)



YH-PNEUMATIC HEAT PRESS MACHINE

Voltage: 220/380V
Power: 4500-12000W
Weight: 300-1000KGS
Spec:60*80/80*100/100*120/
100*130/100*150/110*160



ROLL HEAT TRANSFER MACHINE

YH-1600
Roller diameter: 220mm
Voltage: 220V/380V
Heating power: 6.4kw
Total power :6.5kw
Speed: 20-100 m/h
Temperature: 30-250 degrees
Blanket width: 1620mm
Material transfer width:1500mm
Machine size :370*2100*1010mm(L*W*H)
Package size :2180*580*600mm(L*W*H)
Total weight of the machine: 170KGS
Heating method: quartz heating pipe
Number of heating tubes: 2

YH-80*100 Heat press machine



Feature

- Classic appearance , easy operation and good performance
- Digital screen showing temperature and time helps operator easily read and operate.
- Working table can be pulled smoothly.
- The heating plate with precision wire tube technology keeps the heating temperature stable.

Product parameter

Size	80*100cm
Time	0s-999s
Power	7000W
Weight	220KGS

Temperature	0-300°C
Pushing paper mode	Manual control
Input voltage	220V/380V
Packing size	137*109*70cm(L*W*H)

Parámetros del producto

Tamaño	80*100cm
Tiempo	0s-999s
Potencia	7000W
Peso	220KGS

Temperatura	0-300°C
Modo de empuje del papel	Manual control
Voltaje de entrada	220V/380V
Tamaño de embalaje	137*109*70cm(L*W*H)

YH-450V+ Paper cutting machine



Product parameter

Model	YH-450V+
Max.cutting size	450mm
Min.cutting size	50mm
Cutting thickness	40mm
Cutting precision	±0.5mm
Pressing paper mode	Automatic

Pushing paper mode	Manual control
Power supply	50HZ(60HZ)900W AC220V(110)±10%
Net weight	115KGS
Gross weight	140KGS
Packing size	870*740*700mm(L*W*H)

Parámetros del producto

Modelo	YH-450V+
Tamaño Máximo de Corte	450mm
Tamaño Mínimo de Corte	50mm
Espesor de Corte	40mm
Precisión de Corte	±0.5mm
Modo de Prensa del Papel	Automático

Modo de empuje del papel	Control Manual
Suministro de energía	50HZ(60HZ)900W AC220V(110)±10%
Peso neto	115KGS
Peso bruto	140KGS
Tamaño de embalaje	870*740*700mm(L*W*H)

Laser engraving machine



• Application







• Product details







Product parameter

Model	YH-1390
Laser type	Sealed CO_2 glass laser tube
Laser power	80W / 100W / 130W
Working area	130*90cm
Working platform	Blade and honeycomb platform
Usage	Acrylic sheet, double-color sheet, wood products, bamboo products leather...
Engraving speed	1-800mm/s
Cutting speed	1-600mm/s
Supported graphic fo	BMP,PLT,DST,ALDXF,etc
Cooling mode	CW3000 chiller
Packing size.	194*143*120cm(L*W*H)
Weight	250KGS

Parámetros del producto

Modelo	YH-1390
Tipo de láser	Tubo láser de vidrio de CO_2 sellado
Potencia láser	80W / W100 / 130W
Área de trabajo	130*90cm
Plataforma de trabajo	Plataforma de cuchilla y panal
Uso	Hoja acrílica, hoja bicolor, productos de madera, productos de bambú, cuero...
Velocidad de grabado	1-800mm/s
Velocidad de corte	1-600mm/s
Formatos gráficos admitidos	BMP,PLT,DST,ALDXF,etc
Modo de refrigeración	Refrigerador CW3000
Tamaño de empaque	194*143*120cm(L*W*H)
Peso	250KGS

Laser engraver and cutter



Product introduction

YH-1390 laser engraving and cutting machine is used specially for the non-metal art crafts, gifts and the engraving onto bamboo materials. The machanical structure is strong and stable, making the machine to run at high precision precision. The electrical ability is stable, the engraving speed is high, and the precision is high.The machine can engrave beautiful pictures, peoples photos on the surface of many materials of different of materials (marble, black or colored acrylic etc) It can also engrave many signs, marks. It is a machine with high cost performance.

Product application






Product parameter

Model	YH-6090 / 1390 / 1610 / 1326
Processing area	90*60cm / 130*90cm / 160*100cm / 130*260cm
Laser power	60W/80W/100W/130W
Laser type	Sealed Co2 glass laser tube
Cooling mode	Water cooling and protection system
Resetting positioning accuracy	±0.01mm
Compatible software	Laser cut 5.3, CorelDRAW / AutoCAD/Photoshop
Whole machine size	1450*1200*1000mm(L*W*H)
Engraving speed	1-60000mm/min
Cutting speed	1-20000mm/min
Cutting thickness	0-25mm acrylic (others determined by materials)
Resolution ratio	=0.0125mm
Position system	Red dot
Interface	USB
Minimum shaping character	Letter 0.5mm, Chinese 0.5mm

Support graphic format	DST, PLT, BMP, DXF
Gross power	1000W
Driving mode	DC0.8A24V stepper motor
Cooling mode	Circulation water cooling
Working voltage	AC 110-220V±10%, 50-60Hz or depend on custom
Operating temperature	0-45C
Operating humidity	5-95%
Driving system	Stepper
Option	Up and down table, rotary attachment
Packing	Wooden box
Option	Rotary attachment for column materials
Operation	Video to tell customer how to operate the machine
Net weight	190KGS before package, 240KGS after packag

Parámetros del producto

Modelo	YH-6090 / 1390 / 1610 / 1326
Área de procesamiento	90*60cm / 130*90cm / 160*100cm / 130*260cm
Potencia del láser	60W/80W/100W/130W
Tipo de láser	Tubo de láser de vidrio Co2 sellado
Modo de refrigeración	Sistema de refrigeración por agua y protección
Precisión de posicionamiento al restablecer	±0.01mm
Software compatible	Laser cut 5.3, CorelDRAW / AutoCAD/Photoshop
Tamaño de la máquina completa	1450*1200*1000mm(L*W*H)
Velocidad de grabado	1-60000mm/min
Velocidad de corte	1-20000mm/min
Espesor de corte	0 - 25mm acrílico (otros determinados por los materiales)
Relación de resolución	=0.0125mm
Sistema de posicionamiento	Punto rojo
Interfaz	USB
Carácter de conformación mínimo	Letra 0.5mm, Chino 0.5mm

Formato gráfico admitido	DST, PLT, BMP, DXF
Potencia bruta	1000W
Modo de conducción	Motor paso a paso DC 0.8A 24V
Modo de refrigeración	Refrigeración por agua circulante
Voltaje de trabajo	CA 110 - 220V±10%, 50 - 60Hz o según personalización
Temperatura de funcionamiento	0-45C
Humedad de funcionamiento	5-95%
Sistema de conducción	Paso a paso
Opción	Mesa elevable y bajable, accesorio rotativo
Empaque	Caja de madera
Opción	Accesorio rotativo para materiales cilíndricos
Operación	Vídeo para explicar al cliente cómo operar la máquina
Peso neto	190KGS antes del empaque, 240KGS después del empaque

Laser marking machine



Product introduction

This machine can be widely used in components of automobile and motorcycle, astronautic appartuses titanium, measuring tool, gear, valve, hardware tools, stainless steel ware, medical apparatus, sanitaryware, clocks, jewelries, industrial bearings, metal button of garment, mould and so on. It can mark both words and graphs.

★ High cost-effective.
★ Imported high quality core components, good reliability, high stability.
★ The machine adopts infrared position system, and it has high positioning accuracy, high repetitive positioning precision.
★ Water break protecting, it can prolong the life of laser tube.
★ Equipped with foot switch, it shows humanity solicitude.
★ Equipped with large capacity cache, capable offline engraving;
★ Output power is stable.
★ Mark perfectly, strong security, will never remove

Product application



Product parameter

Laser media	YAG Laser
Laser waelength	1064nm
Laser frequency	0.2KHz~50KHz
Laser power	20w / 30W / 50W / 100W
O switchting way	AOM Q switching
Min linewidth	0.015mm
Maximum engraving speed points	7000 mm/s
Standard engraving range	110*110mm
Focal distance	160mm
Focal spot diameters	0.05mm

Min marking character	0.2mm
Cooling way	Water cooling
Consumable service time	800-1200hours
Specification	1260*990*410mm(L*W*H)
Dimension	700*590*760mm(L*W*H) 630*510*910mm(L*W*H)
Weight	165KGS
Power	220V 50Hz
Power	2kw
Software	Chinese and English marking software
Engraving precision	±0.002m

Parámetros del producto

Medio láser	YAG Laser
Longitud de onda del láser	1064nm
Frecuencia del láser	0.2KHz~50KHz
Potencia del láser	20w / 30W / 50W / 100W
Método de conmutación O	Conmutación AOM Q
Anchura mínima de línea	0.015mm
Velocidad máxima de grabado de puntos	7000 mm/s
Rango de grabado estándar	110*110mm
Distancia focal	160mm
Diámetro del punto focal	0.05mm

Carácter de marcado mínimo	0.2mm
Método de refrigeración	Refrigeración por agua
Tiempo de servicio de consumibles	800-1200 hours
Especificación	1260*990*410mm(L*W*H)
Dimensiones	700*590*760mm(L*W*H) 630*510*910mm(L*W*H)
Peso	165KGS
Potencia	220V 50Hz
Potencia	2kw
Software	Software de marcado en chino e inglés
Precisión de grabado	±0.002m

Fiber laser cutting machine YH-2513G



Product introduction

Fiber laser cutting machine YH2513G is best cutting tool for thin sheet metal cutting, especially for stainless steel cutting. YH2513G Fiber laser cutting machine has the feature of compact layout, stableoptical link, convenient operation and reliable performance. in addition, the laser metal cutting machine also has the following features:

★ Integrated machine design, left and right collecting drawer design highly saving space

★ Stability and reliability for light path system and control system.

★ Fiber laser has high and stable function and lifespan which is over 100000 hours.

★ Higher cutting quality and dfficiency with cutting speed being up to 25m/min with perfect cutting edge

★ High performance reducer, gear and rack, Japanese guide rail and ball screw.

Application



Product parameter

Model	YH2513G	**X/Y Position accuracy**	±0.05mm/m
Working area	2500mm*1300mm	**X/Y Reposition accuracy**	±0.03mm
Fiber laser power	300W / 500W / 750W / 1000W / 1200W	**X/Y axis Max acceleration**	0.8G
X axis	2500mm	**Max velocity of movement**	80m/min
Y axis	1300mm	**Machine weight**	3000KGS
Z axis	100mm	**Machine dimensions**	3500*2100*1800mm(L*W*H)

Parámetros del producto

Modelo	YH2513G	**Precisión de posición X/Y**	±0.05mm/m
Área de trabajo	2500mm*1300mm	**Precisión de reposicionamiento X/Y**	±0.03mm
Potencia del láser de fibra	300W / 500W / 750W / 1000W / 1200W	**Maxima aceleración de los ejes X/Y**	0.8G
Eje X	2500mm	**Velocidad máxima de movimiento**	80m/min
Eje Y	1300mm	**Peso de la máquina**	3000KGS
Eje Z	100mm	**Dimensiones de la máquina**	3500*2100*1800mm(L*W*H)

AD CNC engraver



Product introduction

★ Germany double nuts automatic ball screw.

★ The linear guide rail can ensure high precision and long-term use engraving works.

★ The driver using high speed driver, which is faster than the original model, it can improve by nearly 2 meters.

★ X axis using the popular dust cleaning structure, which can effectively ensure the mechanical parts running perfectly for long time.

★ Break the knife function, it supports up to 9 points, can be automatically location and engraving.

★ Strong Compatibility: it can be compatible with all kinds of softwares, like Type3, Artcarm/castmate/proe/Coreldram/Wentai CAD.

★ It is equipped with high process frequency conversation water cooling spindle, so that can effectively processing on hard objects.

Application



Product parameter

Model	YH-6090	YH-1315	YH-1325
Table dimension	700*1000mm	1350*1750mm	1350*2800mm
Max. engraving size	600*900mm	1200*1500mm	1300*2500mm
Z axis travel	100	110	110
Max. feeding height	150		
Re-positioning accuracy	0.05		
Spindle motor power	1.5/2.2KW		

Rotating speed	0-24000rpm/min
Resolution	0.005mm/pulse
Max. travelling speed	4-5m/min
Carving instruction	G code*.u00*.mmg*pl
Max. carving speed	2-3m/min
Software operating environment	Window XP/Window 32bit
Working Power	220V 50Hz

Parámetros del producto

Modelo	YH-6090	YH-1315	YH-1325
Dimensiones de la mesa	700*1000mm	1350*1750mm	1350*2800mm
Máximo tamaño de grabado	600*900mm	1200*1500mm	1300*2500mm
Recorrido del eje Z	100	110	110
Máxima altura de alimentación	150		
Precisión de reposicionamiento	0.05		
Potencia del motor de husillo	1.5/2.2KW		

Velocidad de rotación	0-24000rpm/min
Resolución	0.005mm/pulse
Velocidad máxima de desplazamiento	4-5m/min
Instrucción de grabado	G code*.u00*.mmg*pl
Velocidad máxima de grabado	2-3m/min
Entorno de operación del software	Window XP/Window 32bit
Potencia de trabajo	220V 50Hz

Wood CNC router



Product introduction

★ Adopt imported ballscrew, high precision, double motors driving, high driving force, unique two-rack axises transmission, So it can guarantee no distortion,no vibration , when it works for a long time.

★ High power frequency water cooling spindle. Main parts are all imported, low noise, high power, long life time.

★ DSP controller system with USB interface, working without connecting with computer and easy to control.

★ Software: CAD/CAM designing software Type3/Artcam/Castmate Wentai etc.

★ The spindle is controlled by Software, high automation.

Applicable industry

★ Woodworking three-dimensional wave board processing, cabinet doors.

★ Wooden craft, paint doors,screens, furniture, craft fan window processing.

★ Products of milling-shaped sculpture.

Application






Product parameter

Model	YHX-1325	**Interface**	USB
X, Y working area	1250*2500mm	**Engraving instruction**	G generation*.u00*.mmg*.plt
Z working area	150mm	**Software working condition**	DSP
Table size	1440*3000mm	**Voltage**	220V 50Hz
Max processing speed	20m/min	**Spindle power**	3.2KW/4.5KW
Clamping form	By vacuum suction	**Work mode**	Stepper
Processor	DSP/main frequency 100MHz	**Spindle rotating speed**	0-24000rpm/min

Parámetros del producto

Modelo	YHX-1325	**Interfaz**	USB
Área de trabajo X, Y	1250*2500mm	**Instrucción de grabado**	G generation*.u00*.mmg*.plt
Área de trabajo Z	150mm	**Condición de trabajo del software**	DSP
Tamaño de la mesa	1440*3000mm	**Voltaje**	220V 50Hz
Máxima velocidad de procesamiento	20m/min	**Potencia del husillo**	3.2KW/4.5KW
Forma de sujeción	Por succión de vacío	**Modo de trabajo**	Stepper
Procesador	DSP/frecuencia principal 100MHz	**Velocidad de rotación del husillo**	0-24000rpm/min

Double color offset printer



Product introduction

★ Easy operation: The machine features a pneumatic clutch supported by an air pump. The touch screen makes the operation very easy.

★ Exact registration: Front paper stopper of registration, both side-pulled-paper stopper, paper feeding horizontal registration, paper feeding table slight adjustment, plate cylinder registration of up/down.

★ Quick plate registration: The plate can be moved axially, which makes registration convenient.

★ Dampening and inking separated: Dampening system is separated from the inking system, which can adjust dampening and inking flexibly and meet the requirements of different printing items for dampening and ink. This is good for multicolor printing.

★ Preset counter: This machine adopts an electromagnetic preset counter. If the quantitative printing work finishes, the paper feeding stops automatically.

★ Double sheets detection: It can avoid problems such as double sheets, paper overlap, and non-stop.

★ The whole machine is controlled by a PLC. There are functions such as auto press, auto stop while paper jam, powder jet, step forward, and step backward. The ink auto supply system lets the color of printing be more uniform.

★ There are 3 inking rollers and 2 forme dampening rollers. We improved the order of the inking roller. Three ink vibrators can drive fastly back and forth. Thus ,the inking supply can be transferred fast and uniformly.

Product details







Product parameter

Model	YH-24711	YH-25611
Max printing size	470*365mm	550*375mm
Max sheet size	460*345mm	560*400mm
Blanket size	470*395*0.15mm	560*420*0.15mm
Blate size	470*420*1.95mm	560*460*1.95mm
Usable paper	28-250g/m²	28-280g/m²
Ink roller	4 (3 version)	4 (3 version)
Dampening roller	5 (2 version)	5 (2 version)

Printing speed	2000-8000/h	2000-7000/h
Power supply	220V, 50Hz	220V, 50Hz
Main motor	1.5KW	1.5KW
Air pump motor	0.55KW	0.55KW
Machine dimension	2350*880*1350mm	2350*950*1350mm
Net weight	1150KGS	1330KGS
Packing size	2450*1000*1450mm	2450*1100*1450mm
Weight	1250KGS	1430KGS

Parámetros del producto

Modelo	YH-24711	YH-25611
Tamaño Máximo de Impresión	470*365mm	550*375mm
Tamaño Máximo de Hoja	460*345mm	560*400mm
Tamaño de la Tela	470*395*0.15mm	560*420*0.15mm
Tamaño de la Placa	470*420*1.95mm	560*460*1.95mm
Papel Utilizable	28-250g/m²	28-280g/m²
Rodillo de Tinta	4 (3 version)	4 (3 version)
Rodillo de Humectación	5 (2 version)	5 (2 version)

Velocidad de Impresión	2000-8000/h	2000-7000/h
Fuente de Alimentación	220V, 50Hz	220V, 50Hz
Motor Principal	1.5KW	1.5KW
Motor de Bomba de Aire	0.55KW	0.55KW
Dimensiones de la Máquina	2350*880*1350mm	2350*950*1350mm
Peso Neto	1150KGS	1330KGS
Tamaño de Embalaje	2450*1000*1450mm	2450*1100*1450mm
Peso	1250KGS	1430KGS

Nail art machine



Fast speed | High quality print | Custom pattern

Main accessories

★ This nail art machine adopts a minimalist design style, with smooth lines and exquisite curves outlining an elegant body contour.

★ Say goodbye to the tediousness and waiting of traditional nail art, this nail art machine is equipped with advanced intelligent chips that can automatically adjust the nail art program according to your needs.

★ This nail art machine has multiple powerful functions to meet all your expectations for nail art.

★ Compared to frequent visits to nail salons and the high cost of nail art each time, this nail art machine can save you a lot of time and money.

• Product details



• Product application



Parámetros del producto

Model	YH-03
User operating system	Android and APP
Print resolution	Max 1200DPI
Fan drying	DC brushless fan
UV light curing	380 & 390nm LED lights
Touch screen	720*1280P

Camera	5M camera
OperatingTemperature	5~35℃
Output power	60W
Packing size	36*30*52cm(L*W*H)
Weight	2750g

Parámetros del producto

Modelo	YH-03
Sistema operativo del usuario	Android y APP
Resolución de impresión	Máx. 1200DPI
Secado por ventilador	Ventilador sin escobillas de CC
Curado por luz UV	Luz LED de 380 y 390nm
Pantalla táctil	720*1280P

Cámara	Cámara de 5M
Temperatura de funcionamiento	5~35℃
Potencia de salida	60W
Tamaño del embalaje	36*30*52cm(L*W*H)
Peso	2750g

Screen printing machine



Product introduction

1. Simple, and more practical constructions,
2. Table type and combinatorial design saves place and convenient for transportation.
3. Screen printing platen layer can rotate independently which is easy operated with higher efficiency
4. Adjustable double-spring devices are available for screen frames of different weight.
5. Screen clamp can be moved up and down, which is suitable for screen frame within 3cm thickness
6. Big supporting device keeps the machine stable and in balance.
7. All-metal construction, advanced electrostatic spraying and electroplating, durable, easy to clear and no rust.
8. Equipped with full set of installing tools, manual instructions, installation and operation videos.

Applicable industry

This screen printing machine is for textile / garment screen printing industry, such as garments, T-shirts and sport cloths, bags, PVC and so on. Whole machine adopts desktop combination desigh to save room. It is particularly suitable for T-shirt shop, small business and individual printing shop etc.



Hand stretcher



Drying oven



UV version dryer



Multi-functional overprinting fingerprint sets



Flash dryer

Product parameter

Color	4 color	**Max frame size**	500*600mm
Station	4 station	**Max image size**	400*500mm
Plate size	450*550mm	**Net weight**	70KGS

Parámetros del producto

Color	4 colores	**Tamaño máximo del marco**	500*600mm
Estación	4 estaciones	**Tamaño máximo de la imagen**	400*500mm
Tamaño de la placa	450*550mm	**Peso neto**	70KGS

Hot foil stamping machine YH-8025

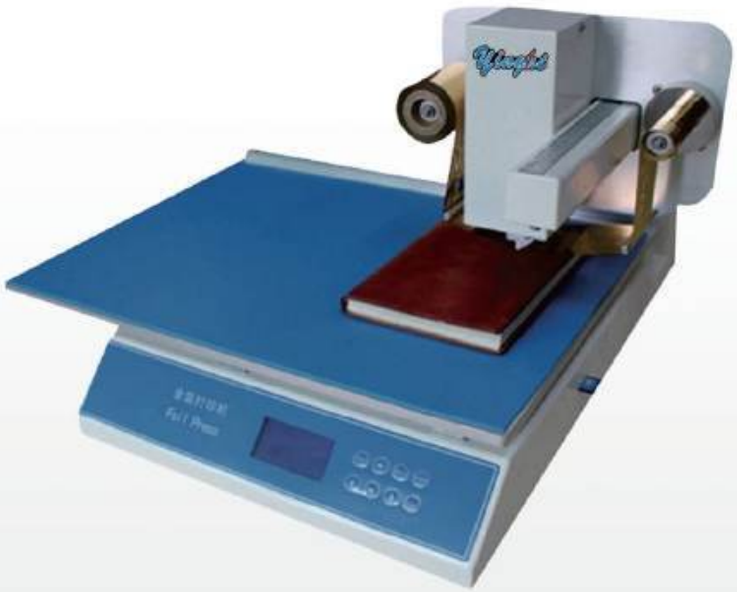

Features

★ Newest design completely replace the traditional gold foil paper.
★ No plate, no need model, easy operation.
★ Without any national computer operating system restrictions no special software, all off-line output.
★ High-resolution 300dpi, handwriting pattern clear.
★ Small size,space-saving weight, easy to move.
★ The most print thickness up to 30mm, versatile.
★ Software control, can process complex pattern text photos
★ The use of imported japanese print heat, print head, print head life of 15,000 meters
★ Simple operation easy understood.
★ Bronzing color can be selected, bronzing, hot silver, and other color ribbon.

• Consumables



Epson nozzle
from Japan



Micro spray
printing accuracy



VSDI variable ink
droplet technology

• Application













Parámetros del producto

Product	Hot foil stamping machine-YH8025
Print interface	USB or SD card
The maximum print width	57 mm
The maximum print width	250 mm
Print speed	20-60 mm/s
Resolution	300*300 dpi

Power supply	150W
Voltage specifications	AC 110-240V 50/60 Hz
Machine size	640mm*530mm*330mm
Packing size	690mm*645mm*550mm
Gross weight / net weight	35KG/24KG

Parámetros del producto

Producto	Máquina de estampado con lámina de calor - YH8025
Interfaz de impresión	USB o tarjeta SD
Anchura máxima de impresión	57 mm
Anchura máxima de impresión	250 mm
Velocidad de impresión	20-60 mm/s
Resolución	300*300 dpi

Suministro de energía	150W
Especificaciones de voltaje	AC 110-240V 50/60 Hz
Tamaño de la máquina	640mm*530mm*330mm
Tamaño de embalaje	690mm*645mm*550mm
Peso bruto / peso neto	35KG/24KG

PVC Card printer



Product introduction

★Outstanding design.
★High speed printing engine.
★Up time increasing with less staff interruptior
★Wide-range, optional encoding modules.
★Intuitive user interface
★Low noise during working

Product application





Product parameter

Model	YH-360E
Print function	Edge-to-edge printing full color (YMCKO) and monochrome printing
Print resolution	300DPI*300DPI(upgradable to 300DPI*600DPI, 300DPI*1200DPI)
Interface	USB+ Etheret
Memory	128MB
Printing speed	Maximum color printing (YMCKO) 180 sheets/hour, 20 seconds/sheet
	Maximum monochrome printing 1200/ h, 3-5 seconds/sheet
Card material	PVC, composite PVC, etc
Card specification	ISO CR-80(54mm*85.6mm)
Input capacity	100 cards (0.76mm/30mil thickness)
Output capacity	70 cards (0.76mm/30mil thickness)
Operate system	Windows XP/7/8/10,Windows
Packing size	293 x174x208mm(L*W*H)
Net weight	4.9KGS
Working environment	Standard :15-32℃, 20%-65%
	Min/Max : 0°C/40°C, 20%-65%
Optional modules	Dual interface chip read and write module,
	non-contact (RFID)read and write module, UHF chip

Parámetros del producto

Modelo	YH-360E
Función de impresión	Impresión de borde a borde a todo color (YMCKO) e impresión en monocromo
Resolución de impresión	300DPI*300DPI (actualizable a 300DPI 600DPI, 300DPI*1200DPI)
Interfaz	USB+ Ethernet
Memoria	128MB
Velocidad de impresión	Impresión a todo color máxima (YMCKO) 180 tarjetas/hora, 20 segundos/tarjeta
	Impresión en monocromo máxima 1200/hora, 3 - 5 segundos/tarjeta
Material de la tarjeta	PVC, PVC compuesto, etc
Especificación de la tarjeta	ISO CR-80(54mm*85.6mm)
Capacidad de entrada	100 tarjetas (espesor 0.76mm/30mil)
Capacidad de salida	70 tarjetas (espesor 0.76mm/30mil)
Sistema operativo	Windows XP/7/8/10,Windows
Tamaño de embalaje	293 x174x208mm(L*W*H)
Peso neto	4.9KGS
Entorno de trabajo	Estándar :15-32°C, 20%-65%
	Mín./Máx.: 0 °C/40 °C, 20 %-65 %
Módulos opcionales	Módulo de lectura y escritura de chip de doble interfaz,
	Módulo de lectura y escritura no contactivo (RFID), chip UHF

Handheld fiber laser welding machine



Main accessories

Equipment name: 800W Air-Cooled laser welding machine		
Laser	RuilaiBo 800W	Two-year warranty, consumables not covered
Welding head	Sikai	One-year warranty, consumables not covered
Control system	Sikai	One-year warranty
Cooling fan	Founder	One-year warranty
Protective lens (Consumable)	Wavelength	Not covered by warranty
Cabinet	Intelligent sheet metal	One-year warranty
Wire feeder	Qilin	One-year warranty
Relay	Schneider	One-year warranty

Accesorios principales

Nombre del equipo: Máquina de soldadura a laser de 800W con enfriamiento por aire		
Láser	RuilaiBo 800W	Garantía de dos años, repuestos consumibles no incluidos
Cabezal de soldadura	Sikai	Garantía de un año, repuestos consumibles no incluidos
Sistema de control	Sikai	Garantía de un año
Ventilador de enfriamiento	Founder	Garantía de un año
Lente protectora (Consumible)	Wavelength	No cubierto por la garantía
Gabinetes	Intelligent sheet metal	Garantía de un año
Alimentador de alambre	Qilin	Garantía de un año
Relevador	Schneider	Garantía de un año

Product parameter

Equipment name	Handheld fiber laser welding machine
Model	CW-800
Laser power	1500W
Laser wavelength	1070 NM
Fiber optic length	Standard 10M
Working mode	Continuous/Modulated
Welding speed range	0~120 mm/s
Operating temperature range	15~35℃
Operating humidity range	<70% No Condensation
Suggested welding thickness	3-5mm

Welding gap requirement	≤0.5mm
Operating voltage	220 V
Fiber laser lifespan	Average 100,000 hours
Intelligent wire feeder model	SS-SS-NEWSmart
Power cord length	Standard 3M
Wire feeding method	Automatic/Manual
Automatic wire feeding speed range	0~9mm
Wire type	Stainless Steel, Iron, Aluminum
Wire size range	0ms
Wire feeding delay	CW-800
Retraction time	0-3ms

Parámetro del producto

Nombre del equipo	Máquina de soldadura a laser de fibra portátil
Modelo	CW-800
Potencia del láser	1500W
Longitud de onda del laser	1070 NM
Longitud de la fibra Óptica	Estandar 10M
Modo de trabajo	Continuo/Modulado
Rango de velocidad de Soldadura	0~120 mm/s
Rango de temperatura de funcionamiento	15~35℃
Rango de humedad de funcionamiento	<70% Sin condensación
Espesor sugerido de soldadura	3-5mm

Requisito de espacio de soldadura	≤0.5mm
Voltaje de funcionamiento	220 V
Duración de vida del laser de fibra	Promedio 100,000 horas
Modelo del alimentador Inteligente de alambre	SS-SS-NEWSmart
Longitud del cable de poder	Estandar 3M
Método de alimentación de alambre	Automático/Manual
Rango de velocidad de alimentación automática de alambre	0~9mm
Tipo de alambre	Acero Inoxidable, Hierro, Aluminio
Rango de tamaño de alambre	0ms
Retardo de alimentación de alambre	CW-800
Tiempo de retracción	0-3ms

Printhead



Epson
XP600 printhead



Epson
I3200 printhead



Epson
DX4



Konica
KM256MN-14PL/LN-42PL



Kyocera
KJ4B-Z



Mutoh
900C 1604 Assembly



Ricoh
GH2220



Polaris
skywalker 512-35/15



Epson
5113



HP
45 Cartridge



Toshiba
CA3/CA4/CA5



Xaar
128 (Electronic)



Spectra
Emerald QE 256



Seiko
SPT1020/35PL



Canon
PF-05



Epson
DX5

Film&Ink&Banner



Cleaning solvent



XP600 / I3200 / DX5 ink



UV ink/UV DTF ink



Sublimation ink



Konica 512I solvent ink



DTF ink



PET film&hot melt powder



AB film



A2 laminating film



Vinyl sticker
120gsm/140gsm vinyl sticker



PU Film



Flex banner

Transfer printing & Cutting film


Metal film


Metal film


Laser film


Flash film


PVC


PVC


Flocking film


Reflective film


PU


PU


Fluorescent film


Luminous film


printable PU film


Printable PU film sample


Luminous film sample



Cap


Hand bag



Ball uniform



Ball uniform

Lighting box


Aluminum frame light box


Bank sign board


Banking signs



Banner slim light box


Crystal light box



Customized light box


Digital advertising player


Display box series


Fabric light box



Forming light box


LED channel letter box



LED channel letter box



Magic mirror light box


Stand light box



Vacuum forming light box